

Two-Valued Coding Transmission of Multi-Rate Quasi-Synchronous CDMA Signals Convolved by Real-Valued Self-Orthogonal Finite-Length Sequences

Jiong LE
Yamaguchi University
2-16-1 Tokiwadai, Ube, Yamaguchi
Japan

Yoshihiro TANADA
Yamaguchi University
2-16-1 Tokiwadai, Ube, Yamaguchi
Japan

Abstract: Two-valued integrand codes are applied to the realization of the multi-rate quasi-synchronous CDMA system using real-valued self-orthogonal finite-length sequences with zero correlation zone. Each user data of multi-level and multi-interval and a common synchronizing sequence are convolved with the user sequence and converted to two-valued integrand code signal. The signal passes through low pass filters in a transmitter and a receiver and is changed to a real-valued signal. In the receiver, the desired data are detected by the correlation processing with the respective code. This transmission system suppresses distortions on amplitude limitation and quantization, and the interchannel and intersymbol interferences.

Key-Words: multi-rate transmission, two-valued integrand code, self-orthogonal finite-length sequence, zero correlation zone, convolution, amplitude distortion, quasi-synchronous CDMA.

1 Introduction

The next generation mobile communication system is desired to transmit multimedia information at multi-rate. Code division multiple access (CDMA) system and orthogonal frequency division multiplexing (OFDM) system are candidates for the next generation system[1],[2].

Basically, the OFDM system has the higher spectral efficiency and the more tolerance for multi-path than the CDMA system, but is caused to intercarrier interferences leading to intersymbol in interferences and interchannel interferences by peak distortion and synchronization error.

Quasi-synchronous CDMA system using zero-correlation-zone (ZCZ) sequences has the tolerance for the synchronization error and the applicability to improve the multi-path. Tanada developed the real-valued self-orthogonal finite-length sequences of zero correlation zone, which have zero sidelobe autocorrelation functions except at both shift ends and zero crosscorrelation functions in a limited shift range[3],[4].

In this paper, two-valued integrand codes[5] are applied to the realization of the multi-rate quasi-synchronous CDMA system using real-valued self-orthogonal finite-length sequences with zero correlation zone. Numerical experiments show the suppression of the distortions on amplitude limitation and quantization and the interchannel and intersymbol in-

terferences.

2 Orthogonal Set of Real-Valued Finite-Length PN Sequences

This section summarizes an orthogonal set of real-valued finite-length pseudonoise (PN) sequences to be applied to a multi-rate quasi-synchronous CDMA system. The sequence is called a self-orthogonal or shift-orthogonal finite-length sequence, also called Huffman sequence, since its shifted sequences are orthogonal within a limited shift range.

An aperiodic autocorrelation function of the self-orthogonal finite-length sequence $\{a_{M,\ell,i}\}$ of length M , member ℓ and ordinal i is given by

$$\begin{aligned} \rho_{M,\ell,\ell,i'} &= \frac{1}{M} \sum_{i=0}^{M-1} a_{M,\ell,i} a_{M,\ell,i-i'} \\ &= \begin{cases} 1 & ; i' = 0 \\ \varepsilon_{M-1} & ; i' = \pm(M-1) \\ 0 & ; elsewhere \end{cases} \quad (1) \end{aligned}$$

where $a_{M,\ell,i} = 0$ for $i < 0$ and $i > M-1$, i' is shift, and ε_{M-1} is a shift-end correlation value. The sequence is replaced by an impulse train with weight $a_{M,\ell,i}$ at every time-chip interval T_c

$$a_{M,\ell}(t) = \sum_{i=0}^{M-1} a_{M,\ell,i} \delta(t - iT_c) \quad (2)$$

and its Fourier transform

$$A_{M,\ell}(f) = \sum_{i=0}^{M-1} a_{M,\ell,i} Z^{-i} \quad (3)$$

where $\delta(t)$ is Dirac's delta function of time t , and $Z = e^{j2\pi fT_c}$, and f is frequency.

For positive ε_{M-1} and odd M , we have the spectrum solution of the sequence $\{a_{M,\ell,i}\}$ as

$$\begin{aligned} A_{M,\ell}(f) &= \sqrt{M\varepsilon_{M-1}} K_{M,\ell} \\ &\times \prod_{m=1}^{\frac{M-1}{2}} \{Z^{-2} + 2\gamma_{M,\ell,m} Z^{-1} \\ &\times \cos \frac{(2m-1)\pi}{M-1} + \gamma_{M,\ell,m}^2\} \end{aligned} \quad (4)$$

where $\gamma_{M,\ell,m} = \alpha_M$ or β_M , $\beta_M = 1/\alpha_M$ and

$$K_{M,\ell} = 1/\prod_{m=0}^{\frac{M-1}{2}} \gamma_{M,\ell,m} \quad (5)$$

$$\alpha_M = \left(\frac{1 + \sqrt{1 - 4|\varepsilon_{M-1}|^2}}{2|\varepsilon_{M-1}|} \right)^{\frac{1}{M-1}}. \quad (6)$$

For negative ε'_{M-1} and odd M , we have the spectrum solution of the sequence $\{a'_{M,\ell,i}\}$ as

$$\begin{aligned} A'_{M,\ell}(f) &= -\sqrt{M|\varepsilon'_{M-1}|} K'_{M,\ell} \\ &\times (Z^{-1} - \gamma'_{M,\ell,0})(Z^{-1} + \gamma'_{M,\ell,\frac{M-1}{2}}) \\ &\times \prod_{m=1}^{\frac{M-3}{2}} \{Z^{-2} - 2\gamma'_{M,\ell,m} Z^{-1} \\ &\times \cos \frac{2m\pi}{M-1} + \gamma_{M,\ell,m}^2\} \end{aligned} \quad (7)$$

$$K'_{M,\ell} = 1/\left\{ \sqrt{\gamma'_{M,\ell,0}\gamma'_{M,\ell,\frac{M-1}{2}}} \prod_{m=1}^{\frac{M-3}{2}} \gamma'_{M,\ell,m} \right\}, \quad (8)$$

where the parameters with the mark ' are defined as similarly as those without the mark '.

We can synthesize the sequence $\{a'_{M_0,\lambda,i}\}$ of length $M_0 = 2M - 1$ and shift-end negative value ε'_{M_0-1} from the sequence $\{a_{M,\ell,i}\}$ of odd length M and shift-end positive value ε_{M-1} and the sequence $\{a'_{M,\ell',i}\}$ of odd length M and shift-end negative value $\varepsilon'_{M-1} = -\varepsilon_{M-1}$. From Eqs.(4) and (7), we obtain the following spectrum of the sequence $\{a'_{M_0,\lambda,i}\}$ as

$$A'_{M_0,\lambda}(f) = K_s \cdot A_{M,\ell}(f) \cdot A'_{M,\ell'}(f) \quad (9)$$

where $\alpha'_{M_0} = \alpha'_M = \alpha_M$ and

$$K_s = \sqrt{M_0|\varepsilon'_{M_0-1}|/(M|\varepsilon_{M-1}|)} \quad (10)$$

$$\varepsilon'_{M_0-1} = -|\varepsilon_{M-1}|^2/(1 - 2|\varepsilon_{M-1}|^2). \quad (11)$$

For the orthogonal set of the suppressed amplitude distinct sequences $\{a'_{M,\ell',i-n}\}$ of $M = 2^{\nu+1} + 1$, $\nu = 3, 4, 5, \dots$, we have the spectrum set

$$\begin{aligned} &A'_{M,\ell'_n}(f) Z^{-n} \\ &= -\sqrt{M|\varepsilon'_{M-1}|} F(\gamma'^2_{M,\lambda_0,0}, Z^{-2}) G(\gamma'_{M,\lambda_0,1}, Z^{-1}) \\ &\times \prod_{m=2}^{\nu-1} G(\gamma'^{2m-1}_{M,\ell'_n,m}, Z^{-2^{m-1}}) Z^{-n} \end{aligned} \quad (12)$$

where

$$\begin{aligned} &F(\gamma'_{M,\lambda_0,0}, Z^{-1}) \\ &= (Z^{-1} - \gamma'_{M,\lambda_0,0})(Z^{-1} + \gamma'^{-1}_{M,\lambda_0,0}) \\ &= Z^{-2} - (\gamma'_{M,\lambda_0,0} - \gamma'^{-1}_{M,\lambda_0,0})Z^{-1} - 1, \quad (13) \\ &G(\gamma'_{M,\lambda_0,\nu}, Z^{-1}) \\ &= Z^{-4} + \sqrt{2}(\gamma'_{M,\lambda_0,\nu} - \gamma'^{-1}_{M,\lambda_0,\nu})Z^{-3} \\ &\quad + (\gamma'_{M,\lambda_0,\nu} - \gamma'^{-1}_{M,\lambda_0,\nu})^2 Z^{-2} \\ &\quad - \sqrt{2}(\gamma'_{M,\lambda_0,\nu} - \gamma'^{-1}_{M,\lambda_0,\nu})Z^{-1} + 1 \end{aligned} \quad (14)$$

and $n = 0, 1, \dots, \frac{M-1}{8} - 1$. The $\frac{M-1}{8}$ sequences are orthogonal at the shift $i = 0 \bmod \frac{M-1}{8}$. From Eq.(12), for $M = 33$, we have the spectrum set for the sequence set $\{a'_{33,\ell'_0,i}\}$, $\{a'_{33,\ell'_1,i-1}\}$, $\{a'_{33,\ell'_2,i-2}\}$ and $\{a'_{33,\ell'_3,i-3}\}$,

$$\begin{aligned} A'_{33,\ell'_0}(f) &= -\sqrt{33|\varepsilon_{32}|} F(\alpha_{33}^2, Z^{-2}) \\ &\times G(\alpha_{33}, Z^{-1}) G(\alpha_{33}^2, Z^{-2}) \\ &\times G(\alpha_{33}^4, Z^{-4}) \end{aligned} \quad (15)$$

$$\begin{aligned} A'_{33,\ell'_1}(f) Z^{-1} &= -\sqrt{33|\varepsilon_{32}|} F(\alpha_{33}^2, Z^{-2}) \\ &\times G(\alpha_{33}, Z^{-1}) G(\beta_{33}^2, Z^{-2}) \\ &\times G(\alpha_{33}^4, Z^{-4}) Z^{-1} \end{aligned} \quad (16)$$

$$\begin{aligned} A'_{33,\ell'_2}(f) Z^{-2} &= -\sqrt{33|\varepsilon_{32}|} F(\alpha_{33}^2, Z^{-2}) \\ &\times G(\alpha_{33}, Z^{-1}) G(\alpha_{33}^2, Z^{-2}) \\ &\times G(\beta_{33}^4, Z^{-4}) Z^{-2} \end{aligned} \quad (17)$$

$$\begin{aligned} A'_{33,\ell'_3}(f) Z^{-3} &= -\sqrt{33|\varepsilon_{32}|} F(\alpha_{33}^2, Z^{-2}) \\ &\times G(\alpha_{33}, Z^{-1}) G(\beta_{33}^2, Z^{-2}) \\ &\times G(\beta_{33}^4, Z^{-4}) Z^{-3} \end{aligned} \quad (18)$$

where $\gamma_{M,\lambda_0,0} = \alpha_{33}$, $\gamma_{M,\lambda_0,1} = \alpha_{33}$, and the number n in $A'_{33,\ell'_n}(f) Z^{-n}$, $n = 0, 1, 2, 3$, is defined by the binary notation as $n = (10)_2 = 2$ corresponding to the reversed product $G(\beta_{33}^4, Z^{-4}) G(\alpha_{33}^2, Z^{-2})$ in

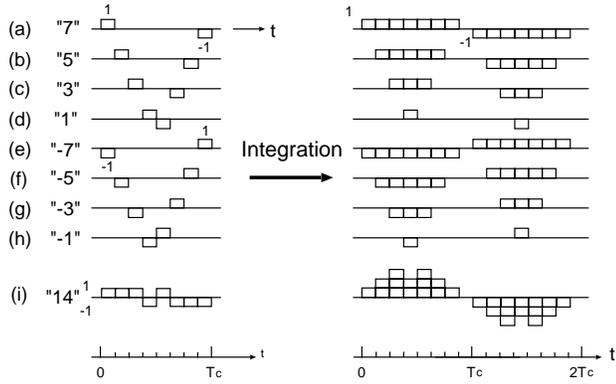


Figure 1: Composition of integrand code and its integration.




Figure 2: Chip waveforms.

Eq.(17). The set of $\{a'_{33,\ell'_0,i}\}$ and $\{a'_{33,\ell'_2,i-2}\}$ is orthogonal at the shifts $i' = 0 \pm 1 \text{ mod } 4$ and is the sequence set with the zero correlation zone. Similarly, we have a set of $\{a'_{65,\ell'_0,i}\}$, $\{a'_{65,\ell'_2,i-2}\}$, $\{a'_{65,\ell'_4,i-4}\}$ and $\{a'_{65,\ell'_6,i-6}\}$ of length $M = 65$, which is orthogonal at the shifts $i' = 0 \pm 1 \text{ mod } 8$.

3 Two-Valued Integrand Codes for Transmission of Real-Valued Signals

This section explains two-valued integrand codes for the transmission of real-valued signals, because two-valued signals are easily amplified and modulated. Real-valued signals are converted to integer signals by quantization. Fig.1 illustrates the composition of a two-valued integrand code and its integration. One chip time duration T_c is divided into 8 time slots and the 8-point moving average is used instead of an integration. (a), (b), (c), (d), (e), (f), (g) and (h) in Fig.1 are the code components which produce the respective front area 7, 5, 3, 1, -7, -5, -3 and -1 after the moving average, and Fig.1(i) is the code which produces the front area $14 = 7 + 5 + 3 - 1$ after the moving average. Generally, for the time slots of even division number n_b , the value of the front area is given by

$$N_{b,i} = \sum_{k=0}^{n_b/2-1} (2k+1)b_{i,k} \quad (19)$$

Table 1: Positive values of two-valued integrand code (n=16).

Value	Code elements	Value	Code elements
0	+ - - - - - +	16	+ + - + + - + +
1	- + + + - - -	17	+ + - + + + - -
2	- + + + - - +	18	+ + - + + + - +
3	+ - - + + - + +	19	+ + + - + + - -
4	+ - - + + + -	20	+ + - + + + - -
5	+ - - + + + - +	21	+ + - + + + + +
6	+ - - + + + - -	22	+ + + - + + + -
7	+ - - + + + - +	23	+ + + - + + + +
8	+ - + + - + - -	24	+ + + + - + + -
9	+ - + + - + + -	25	+ + + + - + + +
10	+ - + + - + + +	26	+ + + + + - - -
11	+ - + + - + + -	27	+ + + + + - + +
12	+ - + + - + + +	28	+ + + + + - - -
13	+ - + + + - + -	29	+ + + + + - + +
14	+ - + + + - + +	31	+ + + + + + - -
15	+ - + + + + - -	32	+ + + + + + + +

where $b_{i,k} \in \{-1, +1\}$. The two-valued integrand code makes the values $N_{b,i}/2 = 0, \pm 1, \pm 2, \dots, \pm n_b^2/8$ except a pair values $\pm(n_b^2/8 - 2)$ that are mapped into $\pm(n_b^2/8 - 1)$ or $\pm(n_b^2/8 - 3)$ so as to reduce the error which decreases as the division number increases. The integrand codes pass through low pass filters in a transmitter and a receiver, and become sine-like pulse. Each integrand code has some combinations for a given value, and is selected to the optimum combination so that every sine-like pulse might resemble. Table 1 shows the positive values and the optimized front half code elements of two-valued integrand codes with $n_b = 16$ [5].

The waveform of the two-valued integrand code for the maximum value is shown in Fig.2(a). At the low pass filter output in the receiver, the waveform is changed to a sine-like pulse in Fig.2(b) as well as those of the other codes, where a waveform weighted to $w_c(t)$ is regarded to be transmitted for each code [5]. A signal constructed by the integrand code and a sequence $\{a_{M,\ell,i}\}$ is equivalently expressed as

$$x(t) = \sum_{i=0}^{M-1} a_{M,\ell,i} \cdot w_c(t - iT_c) \quad (20)$$

and a signal at the low pass filter output in the receiver is given by

$$\hat{x}(t) = \sum_{i=0}^{M-1} a_{M,\ell,i} \cdot \hat{w}_c(t - iT_c) \quad (21)$$

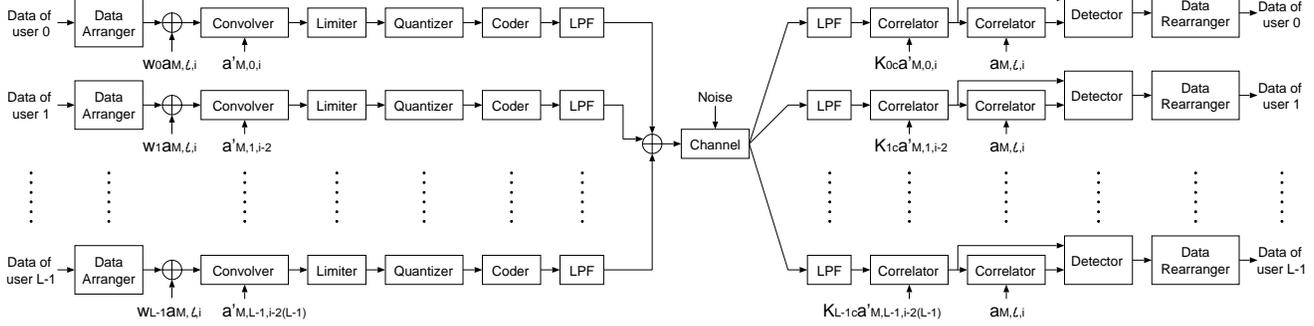


Figure 3: Model of Multi-Rate Quasi-Synchronous CDMA System.

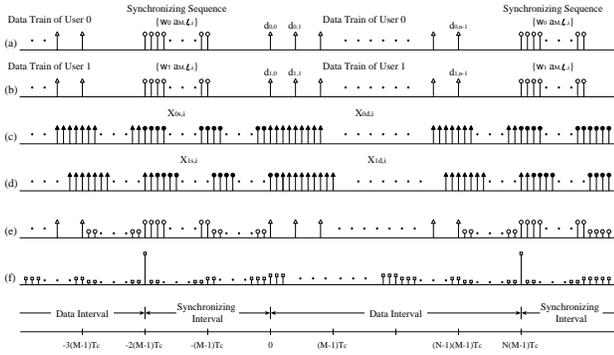


Figure 4: Model of Multi-Rate Quasi-Synchronous CDMA System.

4 Multi-Rate Quasi-Synchronous CDMA System

Fig.3 illustrates a quasi-synchronous CDMA system by convolution between multi-level and multi-interval data and real-valued self-orthogonal finite-length sequences with zero correlation zone $-1 \leq i \leq 1$, and Fig.4 shows signal allotment of the system[6],[7]. Data of each user are arranged to those of multi-level and multi-interval according to the demand for data rate and data reliability. In Fig.4(a), the arranged data for user 0 and a synchronizing sequence $\{w_0 a_{M,\ell,i}\}$ are allotted, where w_0 is the weight for the balance with the data power. A train of p-valued data $d_{0,k} \in \{-V_{p-1}, \dots, -V_{2\nu-1}, \dots, -V_1, V_1, \dots, V_{2\nu-1}, \dots, V_{p-1}\}$, $\nu = 1, 2, \dots, p/2$, $k = 0, 1, \dots, K_0(N-1)-1$ for user 0 is allotted at the front data interval $N(M-1)T_c$, where p-valued data with uniform distribution and average power 1 takes the value

$$V_{2\nu-1} = (2\nu-1)\sqrt{3/(p^2-1)} \quad (22)$$

and K_0 is the number of data for user 0 during $(M-1)T_c$. Convolvering the signals of Fig.4(a) with the sequence $\{a'_{M,\ell'_0,i}\}$ of user 0 makes the signals of Fig.4(c), where the signal $x_{0d,i}$ and its average power P_{0d} in the data interval are given by

$$x_{0d,i} = \sum_{k=0}^{K_0(N-1)-1} d_{0,k} a'_{M,\ell'_0,i-k\mu} \quad (23)$$

$$P_{0d} = \frac{1}{N(M-1)} \sum_{i=0}^{N(M-1)-1} x_{0d,i}^2 \cong K_0 \quad (24)$$

and the synchronizing signal $x_{0s,i}$ and its average power P_{0s} in the synchronizing interval are given by

$$\begin{aligned} x_{0s,i} &= \sum_{i'=0}^{M-1} w_0 a_{M,\ell,i-i'+2(M-1)} a'_{M,\ell'_0,i'} \\ &= \frac{w_0}{K_s} a'_{2M-1,\lambda'_0,i+2(M-1)} \end{aligned} \quad (25)$$

$$P_{0s} = w_0^2 / K_s^2 \quad (26)$$

For user 1, the synchronizing sequence $\{w_1 a_{M,\ell,i}\}$ and a train of q-valued data $d_{1,k} \in \{-V_{q-1}, \dots, -V_1, V_1, \dots, V_{q-1}\}$, $k = 0, 1, \dots, K_1(N-1)-1$, in Fig.4(b) make the signal in Fig.4(d) through the convolution with $\{a'_{M,\ell'_2,i-2}\}$. The similar signals are allotted for the other users. The heights of the data signal $x_{0d,i}$ and the synchronizing signal $x_{0s,i}$ present approximately Gaussian distributions. If we adjust the signal power of each user n to $\sigma_{nx}^2 = P_{nd} = P_{ns}$, $n = 0, 1, 2, \dots$, then the distribution of the height x of the signals $x_{nd,i}$ and $x_{ns,i}$, $n = 0, 1, 2, \dots$, is approximately represented by

$$q_n(x) = \frac{1}{\sqrt{2\pi}\sigma_{nx}} e^{-\frac{x^2}{2\sigma_{nx}^2}} \quad (27)$$

where $\sigma_{nx}^2 = K_n$. When $|\varepsilon_{M-1}| = 1/M$, we obtain $K_s \cong \sqrt{2/M}$ and $w_n = K_s \sqrt{K_n} \cong \sqrt{2K_n/M}$. The signal $x_{n,i}$ of user n is limited between the levels $-r$ and r , and quantized to the integer signal $\hat{x}_{n,i}$ between $-A$ and A as follows:

$$\hat{x}_{n,i} \cong \frac{1}{K_{nc}} x_{n,i} ; \quad -r < x_{n,i} < r \quad (28)$$

$$\hat{x}_{n,i} = \begin{cases} A & ; r \leq x_{n,i} \\ -A & ; x_{n,i} \leq -r \end{cases} \quad (29)$$

where $r = K_{nc}A$, and K_{nc} is a coefficient so that the power of the approximated signal $K_{nc}\hat{x}_{n,i}$ might nearly equal the power of the amplitude-limited signal in the quantization input. The height distribution of the amplitude-limited real-valued signal $x'_{n,i}$ is given by

$$q_{nr}(x') = \begin{cases} q_n(x') & ; -r < x < r \\ Q_0\tilde{\delta}(x' - r) & ; r \leq x \\ Q_0\tilde{\delta}(x' + r) & ; x \leq -r \end{cases} \quad (30)$$

where $\tilde{\delta}(x)$ is Dirac's delta function of x and

$$Q_0 = \int_r^{+\infty} q_n(x') dx' \quad . \quad (31)$$

The power of the amplitude-limited signal is calculated as

$$P_{nr} = \int_{-\infty}^{+\infty} x'^2 q_{nr}(x') dx' \quad , \quad (32)$$

and an efficiency of signal transform is given by

$$\eta = \sqrt{P_{nr}}/\sigma_{nx} \quad . \quad (33)$$

The received signal $\hat{x}_{n,i}$ is processed by a correlator with the reference sequence $\{K_{nc}a'_{M,\ell'_n,i-2n}\}$, to produce the signal $\tilde{x}_{n,i}(n=0)$ shown in Fig.4(e), which is analogous to the signal in Fig.4(a). The signal $\tilde{x}_{n,i}(n=0)$ is processed by another correlator with the reference sequence $\{a_{M,\ell,i}\}$ to give the synchronizing pulse as shown in Fig.4(f). We can detect the data $d_{0,k}$ in Fig.4(e) by the synchronizing pulse in Fig.4(f). The multi-level and multi-interval data are rearranged to the original data array.

The distortion based on amplitude limitation and quantization is treated as an error of signal. The relation between the integer signal $\hat{x}_{n,i}$ and the real-valued signal $x_{n,i}$ is expressed as

$$K_{nc}\hat{x}_{n,i} = \eta x_{n,i} + \Delta x_{n,i} \quad (34)$$

where $\Delta x_{n,i}$ is an error with mean value 0 and variance σ_{nD}^2 from the real-valued signal $x_{n,i}$ and $\Delta x_{n,i}/K_{nc}$ is the error at the quantizer output. When there is no noise in the channel, the correlation output between the integer data signal $\hat{x}_{nd,i}$ and the reference sequence $\{K_{nc}a'_{M,\ell'_n,i-n}\}$ is given by

$$\begin{aligned} \tilde{x}_{nd,i'} &= \frac{1}{M} \sum_i \hat{x}_{nd,i+i'} K_{nc}a'_{M,\ell'_n,i-n} \\ &= \eta \sum_{k=0}^{K_n(N-1)-1} d_{n,k} \cdot \rho_{M,\ell'_n,\ell'_n,i'-k} \\ &\quad + \frac{1}{M} \sum_{i=0}^{M-1} \Delta x_{nd,i+i'} \cdot a'_{M,\ell'_n,i-n} \quad . \quad (35) \end{aligned}$$

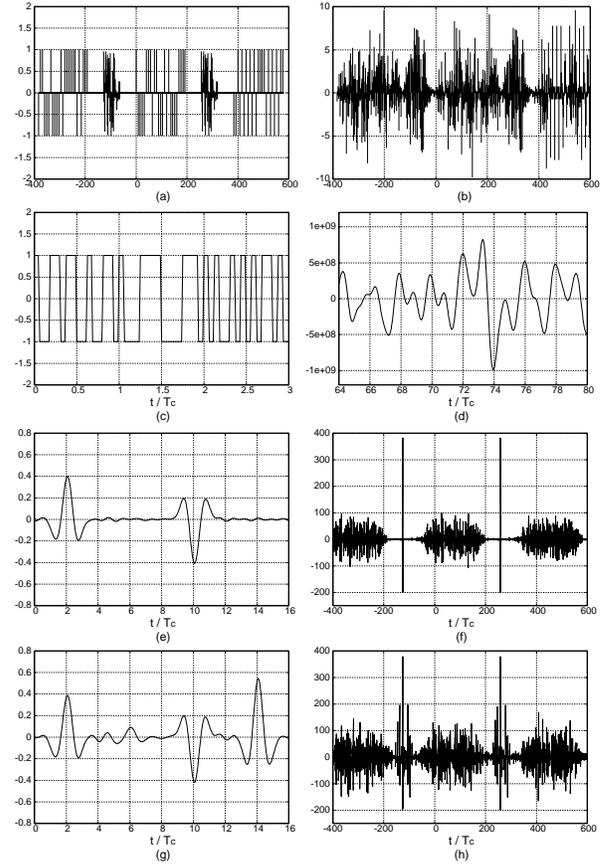


Figure 5: Signals in the experimental system.

In Eq.(35), the first term provides the output data signal power η^2 , and the second term provides the output distortion σ_{nD}^2/M . The input data signal power is given by

$$S_{in} = E[(\hat{x}_{nd,i})^2] = \eta^2 K_n / K_{nc}^2 \quad . \quad (36)$$

where $E[\cdot]$ denotes expectation.

If there is a white Gaussian noise with power $N_{in} = \sigma_{in}^2$ in the channel, the input and the output signal-to-noise ratio for $V_{2\nu-1}$ are given by

$$SNR_{in} = \frac{S_{in}}{N_{in}} = \frac{\eta^2 K_n}{K_{nc}^2 \sigma_{in}^2} \quad (37)$$

$$\begin{aligned} SNR_{out,2\nu-1} &= \frac{S_{out,2\nu-1}}{N_{out}} \\ &= \frac{\eta^2 \cdot V_{2\nu-1}^2}{\sigma_{nD}^2/M + K_{nc}^2 \sigma_{in}^2/M} \quad . \quad (38) \end{aligned}$$

5 Numerical Experiments

We examine the proposed CDMA system using a set of sequences with the zero correlation zone $-1 \leq$

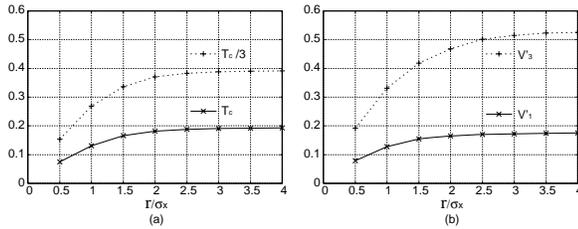


Figure 6: Correlator data output levels. (a) Two-valued data. (b) Four-valued data.

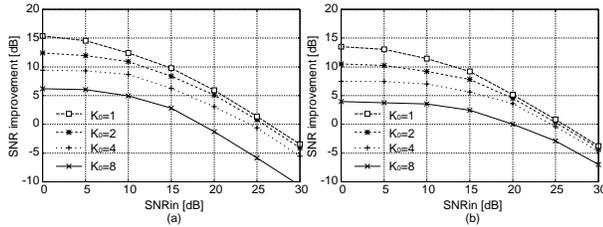


Figure 7: SNR improvement by correlation processing. (a) Moving average of $T_c/3$. (b) Moving average of T_c .

$i' \leq 1$ by numerical experiments, where $M = 65$, $N = 4$, $K_n = 1, 2, \dots, 8$, $p = 2, 4$ and $\mu = (M - 1)/8 = 8$. We use two-valued integrand codes with $n_b = 16$ ($A = 32$) and the orthogonal sequences $\{a'_{65, \ell'_n, i-2n}; n = 0, 1, 2, 3\}$, $\varepsilon'_{64} = -1/65$, and the common sequence $\{a_{65, \ell, i}\}$, $\varepsilon_{64} = 1/65$, where $|a'_{65, \ell'_n, i}|_{max} \cong 2.7463$, $|\rho_{65, \ell'_n, \ell'_n, i'}|_{max} \cong 0.5268$, $|a_{65, \ell, i}|_{max} \cong 1.9979$.

A low pass filter in the transmitter is replaced by the moving averager of $T_c/3$ or T_c , and a low pass filter in the receiver is by the 6-stage connection of the moving averager of $T_c/3$. Fig.5 shows signals of the transmitter and receiver on user 0 in the experimental CDMA system, where $K_0 = 8$, $p = 2$, and the moving averager of T_c is used for the low pass filter in the transmitter, and there exists no additive noise. Figs.5(a), (b), (c), (d), (e), and (f) show a train of data and synchronizing sequence, its convolved signal, the integrand coded signal, the correlator input signal, the correlator output signal for data and that for synchronizing pulse, respectively. Figs.5(g) and (h) show the correlator output signal for data and that for synchronizing pulse when the signal of user 1 is mixed. Fig.6(a) shows the correlator data output levels for $p = 2$ when the moving average durations are $T_c/3$ and T_c in the transmitter. Fig.6(b) shows the correlator data output levels for $p = 4$ when the moving average duration is $T_c/3$ in the transmitter. Figs.7(a) and (b) show the SNR improvements for $p = 4$ when the moving average durations are $T_c/3$ and T_c in the transmitter. These results explain that the higher cut-off

low pass filter in the transmitter gives the output data with the higher level and the narrower pulse width but gives the detected waveform with the more distortion.

6 Conclusion

Two-valued integrand codes are applied to the realization of the multi-rate quasi-synchronous CDMA system using real-valued self-orthogonal finite-length sequences with zero correlation zone. The proposed system is useful for the multimedia data transmission for the demand of data rate and data reliability.

References:

- [1] T. Ottosson and A. Svensson, Multi-rate schemes in DS/CDMA systems, *in Proc. IEEE Vehic. Tech. Conf., Chicago*, pp.1006-1010, July 1995.
- [2] S. S. Das, M. I. Rahman and F. H. P. Fitzek, Multi Rate Orthogonal Frequency Division Multiplexing, *Proc. IEEE International Conference on Communications, ICC 2005*, Vol. 4, pp.2588-2592, 2005.
- [3] P. Fan and M. Darnell, *Sequence Design for Communication Applications*, Research Studies Press, 1996.
- [4] Y. Tanada, Orthogonal Set of Huffman Sequences and Its Application to Suppressed-Interference Quasi-Synchronous CDMA System, *IEICE Trans. Fundamentals*, Vol.E89-A, No.9, September 2006.
- [5] P. Shao and Y. Tanada, Improved Two-Valued and Three-Valued Integrand Codes for Real-Valued Self-Orthogonal Finite-Length Sequence, *Proc. 2006 International Symposium on Intelligent Signal Processing and Communication System*, pp.907-910, 2006.
- [6] J. Le and Y. Tanada, Convolutional Coding Quasi-Synchronous CDMA System Using Real-Valued Self-Orthogonal Finite-Length Sequences, *Proc. of the 2nd International Conference on Wireless Communications, Networking and Mobile Computing*, September 2006.
- [7] J. Le and Y. Tanada, Convolutional Coding Data Transmission System Using Real-Valued Self-Orthogonal Finite-Length Sequences, *WSEAS Trans. on Communications*, Vol.5, Issue 5, pp.694-701, May 2006.