

Computer Assisted Statistical Methods for Process Reliability Analysis

ILIE MITRAN, FLORIN DUMITRU POPESCU, MARIN SILVIU NAN,
SEPTIMIU SORIN SOBA

The Mathematical Department, The Machine and Installation Department,
University of Petroșani
Str. Universității, Nr.20, Petroșani
ROMÂNIA

iliemitran@gmail.com, fpopescu@gmail.com, mnan@upet.ro,
septimiu.soba@gmail.com

<http://www.upet.ro/facultati/stiinte/catedre/mate/CVISTORIC/mitran.html>,

http://ime.upet.ro/mi/html/conf_univ_dr_ing_florin_popes.html,

http://ime.upet.ro/mi/html/nan_m.html

Abstract: - Reliability has recently emerged from the quality concept. If quality represents the total of a product's qualities, which make it good for use according to the destination, the reliability represents the capacity of the product to maintain its quality during the entire usage time. Reliability is the quality of the product extended through time. Analytically, the reliability represents the probability that during a given period of time, a product will be flawless. The technological capability or reliability represents way in which a technological system may realize, on the entire process of fulfilling a mission, the corresponding technological performances for its objectives.

Key-Words: - availability, average time for good operation, maintenance, probabilistic diagrams, Duane

1 Introduction

The operation safety concept is rather a new synthesis concept, which will allow a complete treatment of quality characteristics, which describes the action in time of a technological system, during exploitation (figure 1).

The availability represents the way in which a product is operational in a certain period of time. Analytically speaking, the availability represents the probability that the mentioned product is operational in that exact moment in time.



Fig.1 The Position of Exploitation Safety Concept

The average time for good operation ATGO is a parameter, which helps appreciate the reliability of

products with the same operation time until their first malfunction.

Maintenance represents the way in which a malfunctioning product during exploitation may be operational again during a given period of time. Analytically it may be defined as being the probability that a product may be operational again during a given period of time.

We may state now that operational safety of a product, S, represent the way in which it will complete the mission, depending on the availability A, reliability R, on the capability C and maintenance M.

2 Probabilistic Diagram Method

The Probabilistic Diagrams may help determine the analysis of the operation state of a process

depending on the correctness of its development.

This method has been introduced by Duane and Crow and perfected by Barringer, a method, which allows the diagnostics of a process regarding the variability (of the constancy in time), showing the flaws of hidden factors without allowing their identification.

According to J.T. Duane's research, the double logarithmical diagram for ATGO dependency, cumulated according to the operation time of a continuous process has a linear allure (Figure 2).

The Duane Diagram interpretation is the following: the difference between the two lines is a sign of the continuity of operation the gradient of the inferior curve represents the indicator of constancy (process variability).

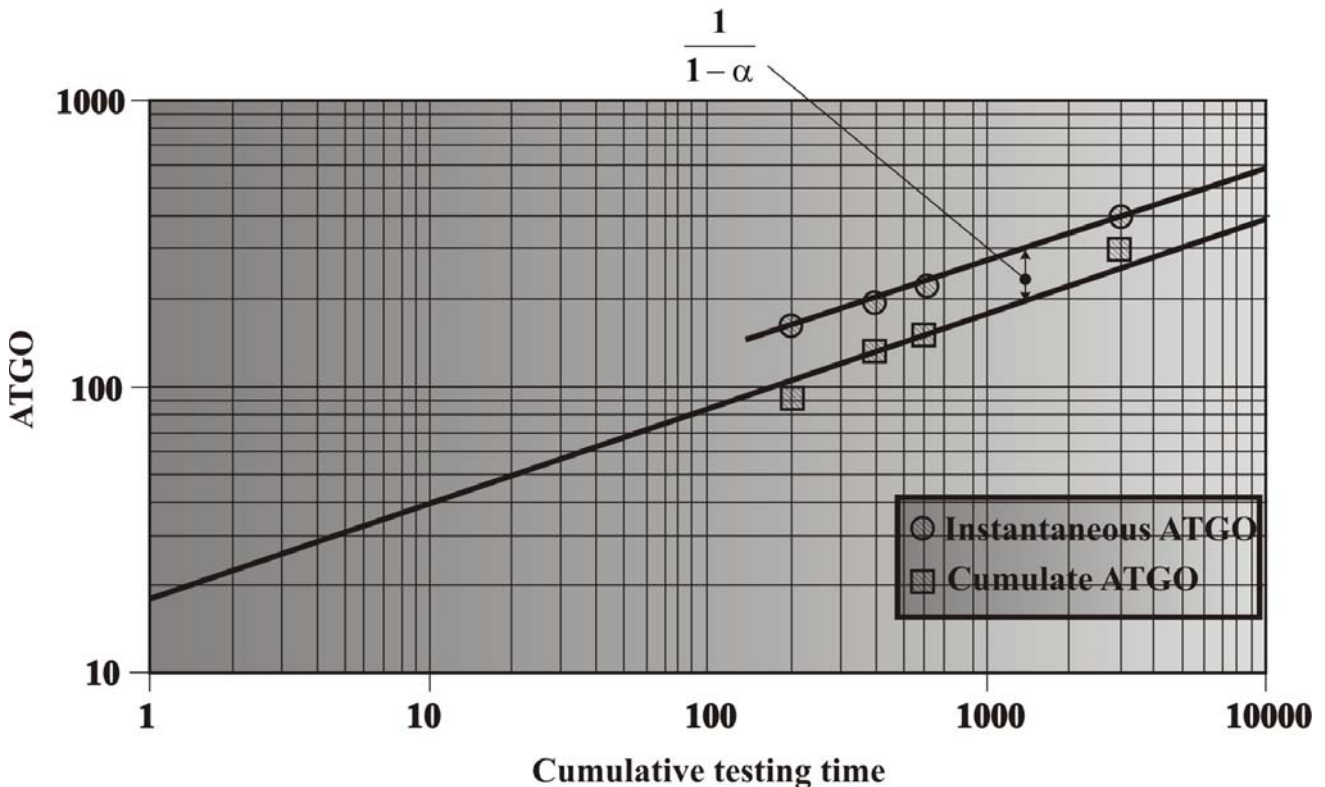


Fig.2 Duane Diagram

$$ATGO_c = \frac{T}{N(T)} \quad (1)$$

we may wrote:

$$y = m \cdot x + c \quad (2)$$

Where:

T – the time period for the observation of the process

N(t) – the number of flaws arisen during the interval T.

Considering the equation of the line in figure 2

With the ad notations:

$$\begin{aligned} y &= \ln(ATGO_c); & x &= \ln(T) \\ m &= \alpha; & c &= \ln(b) \end{aligned} \quad (3)$$

It results:

$$\ln(ATGO_c) = \alpha \cdot \ln(T) + \ln(b) \quad (4)$$

Thus:

$$ATGO_c = b \cdot T^\alpha \quad (5)$$

Considering a constant glitch rate during the observation time, the cumulated glitch rate λ_c will be:

$$\hat{\lambda}_c = \frac{1}{ATGO_c} = \frac{1}{b} \cdot T^{-\alpha} \quad (6)$$

Thus we may write that the estimated number of flaws after the time interval T is:

$$N(T) = \hat{\lambda}_c \cdot T = \frac{1}{b} \cdot T^{1-\alpha} \quad (7)$$

where:

- $\hat{\lambda}_c$ - average value of the cumulative glitch rate;
- T - total observation time;
- $\frac{1}{b}$ - average value of the cumulative glitch rate at the moment T=1, or in the beginning of the test
- α - increase rate of $\hat{\lambda}_c$, $0 \leq \alpha \leq 1$.

The instant glitch rate will be:

$$\lambda_i = \frac{dN(T)}{dt} = \frac{1}{b} \cdot (1-\alpha) \cdot T^{-\alpha} = (1-\alpha) \cdot \hat{\lambda}_c \quad (8)$$

Now we may say that the rate of instant good operation time is:

$$\begin{aligned} ATGO_i &= \frac{1}{\lambda_i} = \frac{1}{1-\alpha} \cdot b \cdot T^\alpha \\ &= \frac{1}{1-\alpha} \cdot ATGO_c \end{aligned} \quad (9)$$

Asset management, represents a an interdisciplinary field where emphasis is laid on the efficient exploitation of technological systems, following the decreasing of exploitation costs in

parallel with obtaining maximum economical effects.

Thus, the process productivity does not represent an absolute performance indicator, if it is not regarded depending on the costs needed to obtain it, and if it has a really high degree of variability.

The time when a process is out of operation actually means the time needed for the activity of maintenance, which lead to the increase of the global cost.

In order to simply, rapidly and efficiently compare the processes and in order to diagnose the processes according to the variability and continuity, the use of probabilistic diagrams is recommended.

The number of classes for which, the histogram is drawn, corresponding to the cumulative operation time on the abscissa, are determined with the following relation:

$$Cls = 1 + \frac{\log_{10}(N_{int})}{\log_{10}(2)} \quad (10)$$

Where:

- Cls – represents the number of classes;
- N_{int} – represents the number of time intervals for which the observation has been made.

The data, on which the histogram is based, are presented in table 1.

Table 1 - The data of the histogram

Month	Operating Hours
1	409800
2	322700
3	389800
4	140000
5	253000
6	398000
7	396200
8	445300
9	401800
10	369600
11	405200
12	192100

A histogram may be drawn if the operation hours during a certain period of time for a, certain machinery are considered to be known (e.g. calendaristically speaking) (figure 3) where the cumulative operation time for a certain class is found on the abscissa, and the percentage this time represents in the total operation time is found on the ordinate.

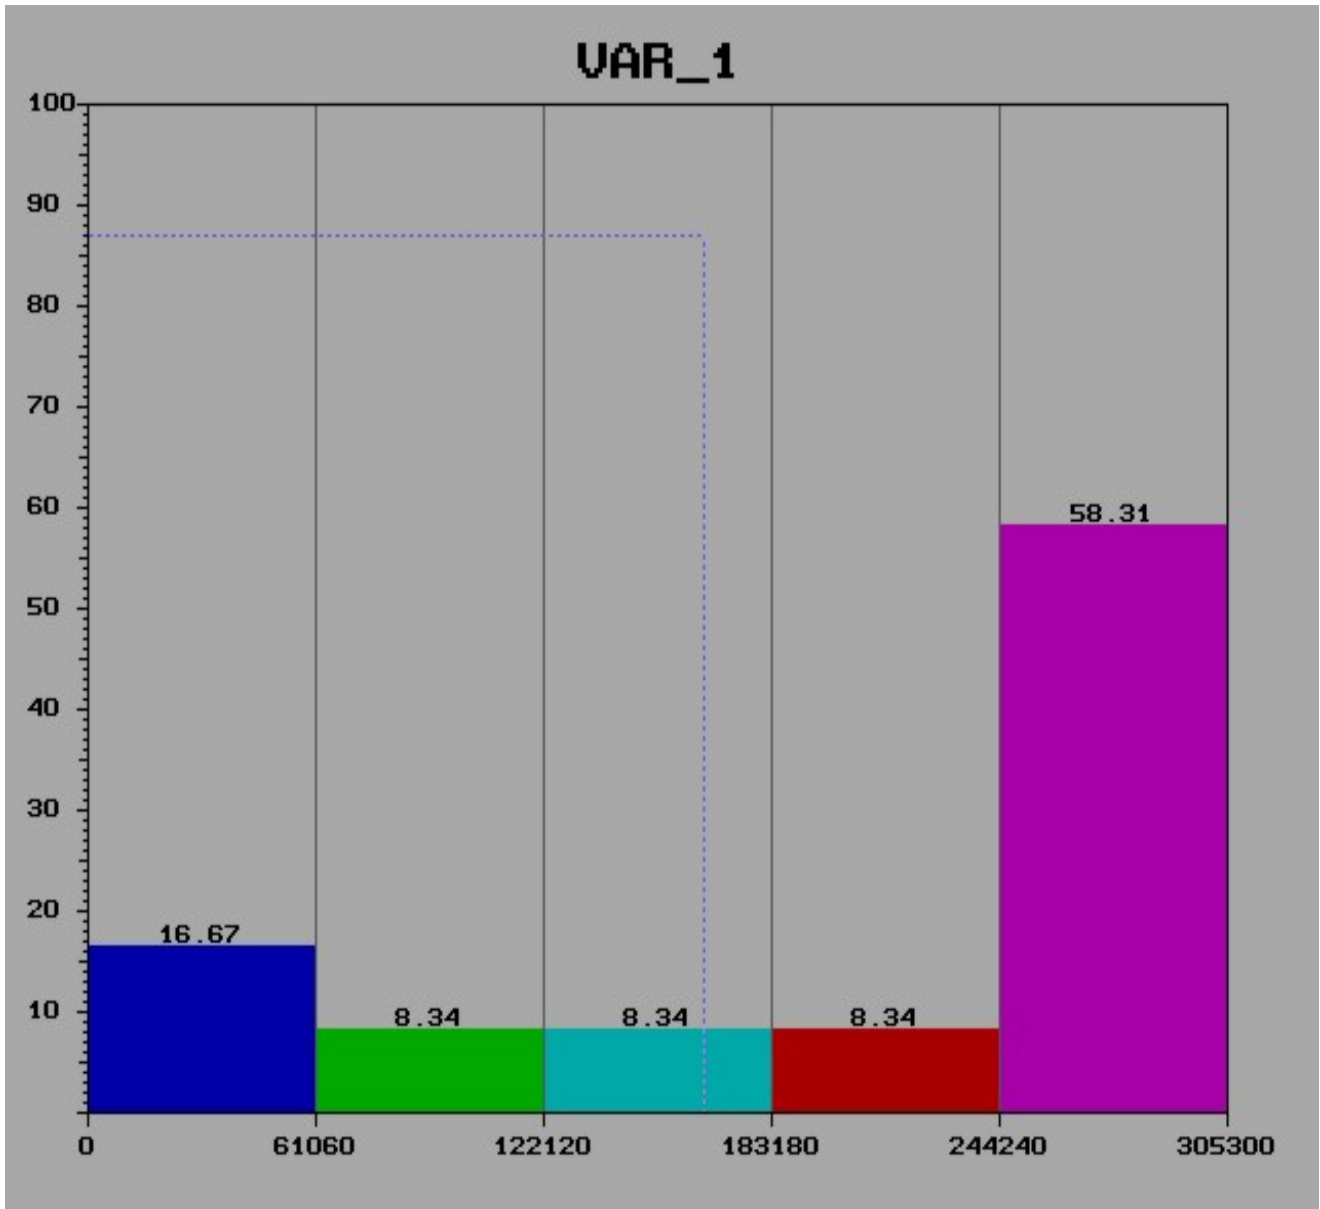


Fig.3 Duane Histogram

The cumulative time subinterval for which the histogram is realized (the size of histogram line on the abscissa) is determined with the following relation:

$$I_t = \frac{T_{max} - T_{min}}{Cl_s} \quad (11)$$

Where:

- T_{max} – is the maximum value of the working time for a certain observation period (in our case, in table 1, month 8);
- T_{min} – is the minimum value of the working time for a certain observation period (in our case, in

table 1, month 4).

Based on the data presented earlier, a Duane diagram has been drawn (Figure 4). The drawn line represents the linear regression for the values from the anterior histogram, and its inclination gives us information regarding the variability of the process. The application, which realizes the histogram and the Duane Diagram, has been developed in C language on a DOS platform.

The software application has been used for the study of the variability during operation and also for the study of the usage degree of some excavators, which work for the SNLO quarries.

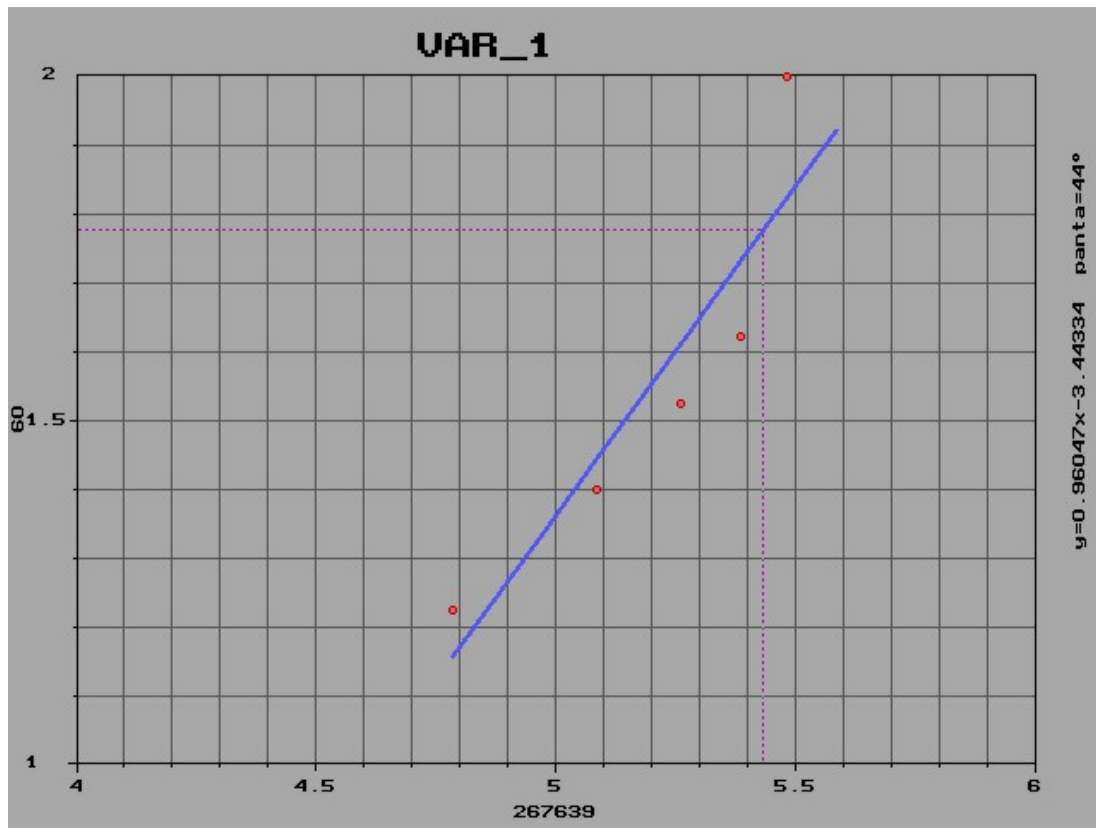


Fig.4 Duane Diagram

3 Conclusions

Classical methodologies exist for the survey of time and capacity use of complex configuration technological systems, allowing the extensive, intensive and global use quantification using a data base which radiographs the operation of the observed system. The disadvantage of these methods derives from the fact that they intercept only the quantitative aspects while leaving aside qualitative ones.

In order to eliminate the above mentioned disadvantages, the paper considers a method based on statistical surveys in the field. This new approach represents effective and delicate means for the study of complex technological systems' operation if it is integrated into a monitoring system, so that managers may be informed on time of the real operation mode of the decision managed system.

The results obtained using the developed application show the simulation to be a useful instrument for the winning, hauling and piling systems operation reshaping, also allowing the possibility to make different forecasts regarding different conditions of operation. The influence of different interruption categories as well as maintenance parameters of the system may also be

studied.

The decision of using this kind of method is justified by the accordance of simulated results with reality results.

References:

- [1] Kovacs Iosif, Iliş Nicolae, Nan Marin Silviu, *Working operation of the mine cutters*, Universitas Publishing House, Petrosani, 2000
- [2] Nan Marin Silviu, *Capacitatea sistemelor de transport*, Editura Universitas Petroşani, 2000
- [3] Nan Marin Silviu, *Parametrii procesului de excavare la excavatoarele cu rotor (Parameters of the excavating regime at bucket wheel excavators)*, Editura Universitas Petroşani, 2007
- [4] Popescu Florin, *Programarea și utilizarea calculatoarelor*, Editura Sigma Plus Deva, 2002
- [5] Popescu Florin, *Calculatorul numeric în industria extractivă*, Editura Universitas Petroşani, 2004
- [6] Popescu Florin Dumitru, *Aplicații industriale ale tehnicii de calcul (Computer systems for industrial applications)*, Editura AGIR Bucureşti, 2009