

# Several Intensive Steel Quenching Models for Rectangular and Spherical Samples

SANDA BLOMKALNA<sup>1</sup>, MARGARITA BUIKE<sup>1,2</sup>, ANDRIS BUIKIS<sup>1,2</sup>

<sup>1</sup> University of Latvia, Faculty of Physics and Mathematics

<sup>2</sup> Institute of Mathematics and Computer Sciences, Raina bulv. 29, Riga, LV1459  
LATVIA

[sanda.blomkalna@gmail.com](mailto:sanda.blomkalna@gmail.com), [mbuike@lanet.lv](mailto:mbuike@lanet.lv), [buikis@latnet.lv](mailto:buikis@latnet.lv),

<http://www.lza.lv/scientists/buikis.htm>

**Abstract:** - In this paper we develop mathematical models for 3-D and 1-D hyperbolic heat equations and construct their analytical solutions for the determination of the initial heat flux for rectangular and spherical samples. Some solutions of time inverse problems are obtained in closed analytical form. Some numerical results are given for a silver ball. The influence of relaxation time on solution, linearity of classical and hyperbolic heat equation, linear and non-linear boundary conditions are investigated.

**Key-Words:** Intensive quenching, Hyperbolic Heat equation, Inverse problem, Exact solution, Conservative averaging method.

## 1 Introduction

Contrary to the traditional method the intensive quenching process uses environmentally friendly highly agitated water or low concentration of water/mineral salt solutions and very fast cooling rates are applied [1]-[2].

We propose to use hyperbolic heat equation for more realistic description of the intensive quenching (IQ) process (especially for process initial stage). Complete bibliography on hyperbolic heat conduction equation can be found in [3]. In our previous papers we have constructed analytical exact and approximate [4], [5] solutions for IQ processes. Here we consider few other models and construct solutions for direct and inverse problems of hyperbolic heat conduction equation. Here are both approximate (on the basis of conservative averaging method, see [6], [7]), and exact (on the basis of Green function method, see [8]-[10]) solutions.

## 2 Mathematical Formulation of 3-D Problem and Solutions for Parallelepiped

In this section we give the mathematical statement for direct and time inverse problems.

### 2.1 Mathematical Statement of Full 3-D Problem for Parallelepiped

The non-dimensional temperature field fulfils hyperbolic heat equation (telegraph equation):

$$\tau_r \frac{\partial^2 V}{\partial t^2} + \frac{\partial V}{\partial t} = a^2 \left( \frac{\partial^2 V}{\partial x^2} + \frac{\partial^2 V}{\partial y^2} + \frac{\partial^2 V}{\partial z^2} \right),$$

$$x \in (0, l), y \in (0, b), z \in (0, w),$$

$$t \in (0, T], \quad a^2 = \frac{k}{c\rho}.$$

Here  $c$  is the specific heat capacity,  $k$  - the heat conduction coefficient,  $\rho$  - the density,  $\tau_r$  - the relaxation time.

It is natural assumption that planes  $x = 0, y = 0, z = 0$  are symmetry surfaces of the sample:

$$\left. \frac{\partial V}{\partial x} \right|_{x=0} = \left. \frac{\partial V}{\partial y} \right|_{y=0} = \left. \frac{\partial V}{\partial z} \right|_{z=0} = 0. \quad (2)$$

On the all other sides of steel part we have heat exchange with environment. Although the method proposed here is applicable for non-homogeneous environment temperature, for simplicity we consider models of constant environment temperature  $\Theta_0 = 0$ . This restriction gives following homogeneous third type boundary conditions on the all three outer sides (here  $h$  is heat exchange coefficient):

$$\left( \frac{\partial V}{\partial x} + \beta V \right) \Big|_{x=l} = 0, \beta = \frac{h}{k}, \quad (3)$$

$$\left( \frac{\partial V}{\partial y} + \beta V \right) \Big|_{y=b} = \left( \frac{\partial V}{\partial z} + \beta V \right) \Big|_{z=w} = 0. \quad (4)$$

The initial conditions are assumed in form:

$$V|_{t=0} = V_0(x, y, z), \quad (5)$$

$$\frac{\partial V}{\partial t} \Big|_{t=0} = W_0(x, y, z). \quad (6)$$

From the practical point of view the condition (6) is unrealistic. The initial heat flux must be determined theoretically. As additional condition we assume that the temperature distribution and the heat fluxes distribution at the end of process are given (known):

$$V|_{t=T} = V_T(x, y, z), \quad (7)$$

$$\frac{\partial V}{\partial t} \Big|_{t=T} = W_T(x, y, z). \quad (8)$$

As the first step we use well known substitution:

$$V(x, y, z, t) = \exp\left(-\frac{t}{2\tau_r}\right) U(x, y, z, t). \quad (9)$$

Then the differential equation (1) transforms into differential equation without first time derivative:

$$\frac{\partial^2 U}{\partial t^2} = a_\tau^2 \left( \frac{\partial^2 U}{\partial x^2} + \frac{\partial^2 U}{\partial y^2} + \frac{\partial^2 U}{\partial z^2} \right) + \frac{1}{4\tau_r^2} U, \quad (10)$$

$$x \in (0, l), y \in (0, b), z \in (0, w), t \in (0, T],$$

$$a_\tau^2 = a^2 / \tau_r.$$

The initial and boundary conditions take the form:

$$U|_{t=0} = V_0(x, y, z), \quad (11)$$

$$\frac{\partial U}{\partial t} \Big|_{t=0} = W_0(x, y, z) + \frac{V_0(x, y, z)}{2\tau_r}, \quad (12)$$

$$\frac{\partial U}{\partial x} \Big|_{x=0} = \frac{\partial U}{\partial y} \Big|_{y=0} = \frac{\partial U}{\partial z} \Big|_{z=0} = 0, \quad (13)$$

$$\left( \frac{\partial U}{\partial x} + \beta U \right) \Big|_{x=l} = \left( \frac{\partial U}{\partial y} + \beta U \right) \Big|_{y=b} = 0, \quad (14)$$

$$\left( \frac{\partial U}{\partial z} + \beta U \right) \Big|_{z=w} = 0. \quad (15)$$

Additional conditions (7), (8) transform as follow:

$$U|_{t=T} = \exp\left(\frac{T}{2\tau_r}\right) V_T(x, y, z), \quad (16)$$

$$\frac{\partial U}{\partial t} \Big|_{t=T} = \exp\left(\frac{T}{2\tau_r}\right) \left[ W_T(x, y, z) + \frac{V_T(x, y, z)}{2\tau_r} \right]. \quad (17)$$

## 2.2 Exact Solution of Direct 1-D Problem

We will start with formulation of the mathematical model for thin in  $y, z$  – directions of steel part (one-dimensional model):  $w \ll l, b \ll l$ . Then in accordance with conservative averaging method [6], [7] we introduce following integral averaged value:

$$u(x, t) = (bw)^{-1} \int_0^b dy \int_0^w U(x, y, z, t) dz. \quad (18)$$

Assuming the simplest approximation by constant in the  $y, z$  – directions, we obtain 1-D differential equation with the source term:

$$\frac{\partial^2 u}{\partial t^2} = a_\tau^2 \frac{\partial^2 u}{\partial x^2} - cu, \quad x \in (0, l), t \in (0, T],$$

$$c = \left[ \beta \left( \frac{1}{b} + \frac{1}{w} \right) - \frac{1}{4\tau_r^2} \right]. \quad (19)$$

Initial conditions (11), (12) for the differential equation (10) are as follow:

$$u|_{t=0} = u_0(x), \quad (20)$$

$$u_0(x) = (bw)^{-1} \int_0^b dy \int_0^w V_0(x, y, z) dz,$$

$$\frac{\partial u}{\partial t} \Big|_{t=0} = v_0(x), \quad v_0(x) = w_0(x) + \frac{u_0(x)}{2\tau_r}, \quad (21)$$

$$w_0(x) = (bw)^{-1} \int_0^b dy \int_0^w W_0(x, y, z) dz.$$

The boundary conditions remain in the same form:

$$\frac{\partial u}{\partial x} \Big|_{x=0} = 0, \quad \left( \frac{\partial u}{\partial x} + \beta u \right) \Big|_{x=l} = 0. \quad (22)$$

Solution of this one-dimensional direct problem (19)-(22) is well known, see [9]:

$$u(x, t) = \frac{\partial}{\partial t} \int_0^l u_0(\xi) G(x, \xi, t) d\xi + \int_0^l v_0(\xi) G(x, \xi, t) d\xi. \quad (23)$$

The Green function has representation [9]-[12]:

$$G(x, \xi, t) = \sum_{i=1}^{m-1} \frac{\varphi_i(x) \varphi_i(\xi) \sinh\left(t \sqrt{a_\tau^2 \lambda_i^2 + c}\right)}{\|\varphi_i\|^2 \sqrt{a_\tau^2 \lambda_i^2 + c}} + \sum_{i=m}^{\infty} \frac{\varphi_i(x) \varphi_i(\xi) \sin\left(t \sqrt{a_\tau^2 \lambda_i^2 + c}\right)}{\|\varphi_i\|^2 \sqrt{a_\tau^2 \lambda_i^2 + c}}, \quad (24)$$

$$\varphi_i(x) = \cos(\lambda_i x), \|\varphi_i\|^2 = \frac{l}{2} + \frac{\beta}{2(\lambda_i^2 + \beta^2)}.$$

Here the natural number  $m$  in the both sums is given by inequalities:

$$a_r^2 \lambda_i^2 + \left[ \beta \left( \frac{1}{b} + \frac{1}{w} \right) - \frac{1}{4\tau_r^2} \right] < 0, i = \overline{1, m-1},$$

$$a_r^2 \lambda_i^2 + \left[ \beta \left( \frac{1}{b} + \frac{1}{w} \right) - \frac{1}{4\tau_r^2} \right] > 0, i = \overline{m, \infty}.$$

The eigenvalues  $\lambda_i$  are roots of the transcendental equation:  $\lambda \tan(\lambda l) = \beta$ .

### 2.3 Solution of Time inverse 1-D Problem

As it was told earlier, from experimental point of view initial condition (17) is unrealizable and the  $v_0(x)$  must be calculated theoretically. The differentiation of solution (23) gives:

$$\frac{\partial}{\partial t} u(x, t) = \int_0^l u_0(\xi) \frac{\partial^2}{\partial \tilde{t}^2} G(x, \xi, t) d\xi$$

$$+ \int_0^l v_0(\xi) \frac{\partial}{\partial \tilde{t}} G(x, \xi, t) d\xi. \quad (25)$$

The additional conditions (16) and (17) at the end of process regarding the function  $u(x, t)$  are as follow:

$$u|_{t=T} = u_T(x), u_T(x) = \exp\left(\frac{T}{2\tau_r}\right) \tilde{v}_T(x), \quad (26)$$

$$\tilde{v}_T(x) = (bw)^{-1} \int_0^b dy \int_0^w V_T(x, y, z) dz,$$

respectively

$$\frac{\partial u}{\partial \tilde{t}} \Big|_{t=T} = v_T(x),$$

$$v_T(x) = \exp\left(\frac{T}{2\tau_r}\right) \left[ \frac{\tilde{v}_T(x)}{2\tau_r} + w_T(x) \right], \quad (27)$$

$$w_T(x) = (bw)^{-1} \int_0^b dy \int_0^w W_T(x, y, z) dz.$$

There is an interesting situation, if both additional conditions are known. In this case we introduce new time argument by formula

$$\tilde{t} = T - t. \quad (28)$$

The main differential equation (19) remains its form:

$$\frac{\partial^2 u}{\partial \tilde{t}^2} = a_r^2 \frac{\partial^2 u}{\partial x^2} - cu, x \in (0, l), \tilde{t} \in (0, T]. \quad (29)$$

The boundary conditions (22) remain the same. Both additional conditions transform to initial conditions for the equation (28):

$$u|_{\tilde{t}=0} = u_T(x), \frac{\partial u}{\partial \tilde{t}} \Big|_{\tilde{t}=0} = -v_T(x). \quad (30)$$

The solution of direct problem (29), (22) and (30) is similar with the solution (23):

$$u(x, \tilde{t}) = \frac{\partial}{\partial \tilde{t}} \int_0^l u_T(\xi) G(x, \xi, \tilde{t}) d\xi$$

$$- \int_0^l v_T(\xi) G(x, \xi, \tilde{t}) d\xi. \quad (31)$$

For the heat flux we have an expression:

$$\frac{\partial}{\partial \tilde{t}} u(x, \tilde{t}) = \int_0^l u_T(\xi) \frac{\partial^2}{\partial \tilde{t}^2} G(x, \xi, \tilde{t}) d\xi$$

$$- \int_0^l v_T(\xi) \frac{\partial}{\partial \tilde{t}} G(x, \xi, \tilde{t}) d\xi. \quad (32)$$

From formula (32) immediately follows a nice explicit representation for the initial heat flux:

$$v_0(x) = \int_0^l u_T(\xi) \frac{\partial^2}{\partial \tilde{t}^2} G(x, \xi, \tilde{t}) \Big|_{\tilde{t}=T} d\xi$$

$$- \int_0^l v_T(\xi) \frac{\partial}{\partial \tilde{t}} G(x, \xi, \tilde{t}) \Big|_{\tilde{t}=T} d\xi. \quad (33)$$

In previous paper [8] we have used the Green function for classical (parabolic) heat equation, but here we used Green function for the wave (hyperbolic) equation.

## 3 Application of Conservative Averaging Method for Time Inverse Hyperbolic Heat Conduction Problem

In this part we consider 1-D spherical hyperbolic heat equation:

$$\tau_r \frac{\partial^2 V}{\partial t^2} + \frac{\partial V}{\partial t} = a^2 \frac{1}{r} \frac{\partial^2}{\partial r^2} (rV).$$

Well known simple transformation  $U = rV$  allows us to go to Cartesian coordinates. We compare the solution of this equation with classical parabolic heat equation.

### 3.1 Original Problem

We start with the formulation of the one-dimensional mathematical model for intensive steel quenching without heat losses:

$$\tau_r \frac{\partial^2 U}{\partial t^2} + \frac{\partial U}{\partial t} = a^2 \frac{\partial^2 U}{\partial x^2} + f(x, t), \quad (34)$$

$$x \in (0, H), t \in (0, T), H < \infty,$$

$$\left( -k \frac{\partial U}{\partial x} + hU \right) = h\Theta(t), x = 0, t \in [0, T], \quad (35)$$

$$\frac{\partial U}{\partial x} = 0, x = H, \quad (36)$$

$$U = U^0(x), t = 0, x \in [0, H]. \quad (37)$$

The initial heat flux

$$\frac{\partial U}{\partial t} = V_0(x), x \in [0, H], t = 0 \quad (38)$$

can't be measured experimentally and must be calculated. As additional condition we assume experimentally realizable condition –the temperature distribution at the end of process is given:

$$U(x, T) = U_T(x), x \in [0, H]. \quad (39)$$

### 3.2 The Approximate Solution by Conservative Averaging Method

By applying conservative averaging method to the problem (9)-(14) we obtain relatively the integral average temperature  $u_0(t)$  following boundary problem for ordinary differential equation:

$$\tau_r \frac{du_0^2}{dt^2} + \frac{du_0}{dt} + \frac{h}{c_H} u_0 = \frac{h}{c_H} \Theta(t) + f(t), \quad (40)$$

$$c_H = c\rho H,$$

$$u_0(0) = u_0^0, u_0(T) = u_T. \quad (41)$$

We are interested to determine

$$v_0 = \frac{du_0(0)}{dt}.$$

To solve this problem we split it in two sub-problems:

$$u_0(t) = \bar{u}(t) + \bar{w}(t).$$

First of them has homogeneous main equation:

$$\tau_r \frac{d\bar{u}}{dt^2} + \frac{d\bar{u}}{dt} + \frac{h}{c_H} \bar{u} = 0 \quad (42)$$

together with non-homogeneous initial conditions:

$$\bar{u}(0) = u_0^0, \frac{d\bar{u}(0)}{dt} = v_0. \quad (43)$$

This problem can be solved in traditional way and its solution is:

$$\bar{u}(t) = e^{-\frac{t}{2\tau_r}} \left( u_0^0 e^{\frac{t}{2\tau_r}} + \left( \left( \frac{u_0^0}{2\tau_r} \left( 1 - \frac{1}{\beta} \right) - \frac{v_0}{\beta} \right) \sinh\left(\frac{t}{2\tau_r} \beta\right) \right) \right).$$

$$\text{Here } \beta = \frac{1}{2\tau_r} \sqrt{1 - 4\tau_r \frac{h}{c_H}}. \quad (44)$$

The second sub-problem has non-homogeneous main equation and homogeneous initial conditions:

$$\tau_r \frac{d\bar{w}^2}{dt^2} + \frac{d\bar{w}}{dt} + \frac{h}{c_H} \bar{w} = \frac{h}{c_H} \Theta(t) + f(t) \quad (45)$$

$$\bar{w}(0) = \frac{d\bar{w}(0)}{dt} = 0.$$

The solution of this problem has a following form:

$$\bar{w}(t) = e^{-\frac{t}{2\tau_r}} \int_0^t q(t-\tau) \Phi(\tau) d\tau,$$

$$\Phi(t) = \tau_r^{-1} [\gamma \Theta(t) + f(t)] e^{\frac{t}{2\tau_r}}, \gamma = \frac{h}{c_H}.$$

Here  $q(t)$  is solution of the differential equation (45) with special initial conditions:

$$q(0) = 0, \frac{dq(0)}{dt} = 1,$$

$$\text{i.e. } q(t) = \beta^{-1} \sinh(\beta t).$$

Hence:

$$\bar{w}(t) = \frac{2\tau_r}{\beta} e^{-\frac{t}{2\tau_r}} \int_0^t \sinh\left(\frac{t-\omega}{2\tau_r} \beta\right) \left( e^{\frac{\omega}{2\tau_r}} \frac{h}{c \cdot \rho} \Theta(\omega) \right) d\omega$$

Consequently, we have finally obtained the solution of the problem (40), (41) as:

$$u_0(t) =$$

$$e^{-\frac{t}{2\tau_r}} \left[ u_0^0 e^{\frac{t}{2\tau_r}} + \left( \frac{1}{2\tau_r} u_0^0 - u_0^0 \frac{1}{\beta 2\tau_r} - \frac{v_0}{\beta} \right) \sinh\left(\frac{t}{2\tau_r} \beta\right) \right]$$

$$+ \frac{2\tau_r}{\beta} e^{-\frac{t}{2\tau_r}} \int_0^t \sinh\left(\frac{t-\omega}{2\tau_r} \beta\right) \left( e^{\frac{\omega}{2\tau_r}} \frac{h}{c \cdot \rho} \Theta(\omega) \right) d\omega.$$

(21) As the last step we use the additional information – condition (20), i.e. the known value at the end of the process. This information allows us to express unknown second initial condition in closed and simple form:

$$\begin{aligned} v_0 &= \frac{\beta}{\sinh\left(\frac{T}{2\tau_r} \beta\right)} \times \\ & \left( u_T \cdot e^{\frac{T}{2\tau_r}} + u_0^0 \cdot e^{\frac{T}{2\tau_r} \beta} + \frac{u_0^0}{2\tau_r} \left( 1 - \frac{1}{\beta} \right) \sinh\left(\frac{T}{2\tau_r} \beta\right) \right) + \\ & \frac{2\tau_r}{\sinh\left(\frac{T}{2\tau_r} \beta\right)} \times \end{aligned} \quad (46)$$

$$\int_0^T \sinh\left(\frac{T-\omega}{2\tau_r} \beta\right) \left( \frac{h}{c \cdot \rho} \Theta(\omega) + f(\omega) \right) e^{\frac{\omega}{2\tau_r}} d\omega.$$

We can increase the order of the approximation for the solution of the original problem (9)-(14) by the

representation with polynomial of second degree and exponential approximation. Linear approximation reduces to approximation by constant. Approximation with second degree polynomial:

$$U(x, t) = u_0(t) + \frac{x}{R} u_1(t) + \left(\frac{x}{R}\right)^2 u_2(t).$$

We use boundary conditions to determine  $u_1(t)$  and  $u_2(t)$ . The integration over interval  $x \in [0, H]$  of the main equation practically gives the same ordinary differential equation (40). The only difference is in the same coefficient at two terms:

$$\tau_r \frac{du_0^2}{dt^2} + \frac{du_0}{dt} + \frac{\delta}{R} u_0 = \delta \Theta(t) + f(t), \quad (47)$$

$$\delta = \frac{2kh}{c\rho(hR + 2k)}.$$

The additional conditions remain the same. It means that we can use obtained above formulae replacing the parameters  $\beta, \gamma$  by following expressions:

$$\beta = \frac{1}{2\tau_r} \sqrt{1 - \frac{4\tau_r \cdot h}{c_H(1 + \frac{hR}{2k})}}, \quad \gamma = \frac{h}{c_H \left(1 + \frac{hH}{2k}\right)} \quad (48)$$

Exponential approximation:

$$U(x, t) = u_0(t) + (e^{-x} - 1)u_1(t) + (1 - e^x)u_2(t).$$

Differential equation is in form

$$\tau_r \frac{du_0^2}{dt^2} + \frac{du_0}{dt} + \frac{hku_0}{2c\rho R(k \sinh R + h \cosh R - h)} = \frac{hk\Theta(t)}{2c\rho(k \sinh R + h \cosh R - h)} + f(t).$$

Alike previous case, difference is only in parameters  $\beta$  and  $\gamma$ :

$$\beta = \frac{1}{2\tau_r} \sqrt{1 - \frac{4\tau_r \cdot h}{c_H(2(\sinh R + \frac{h}{k}(\cosh R - 1)))}}, \quad \gamma = \frac{h}{c_H(2(\sinh R + \frac{h}{k}(\cosh R - 1)))}. \quad (49)$$

We have obtained solution of well posed problem in closed form. This solution can be used as initial approximation for integrated over  $x \in [0, H]$  equation.

Conservative averaging method can be applied to problems with non linear BC. Condition for nucleate

boiling ( $m \in [3; 3\frac{1}{3}]$ ):

$$k \frac{\partial U}{\partial x} + \beta^m [U - \Theta_B(t)]^m = 0, \quad x = R, \quad t \in [0, T].$$

## 4 Results

We solved several problems and obtained numerical results using Maple and COMSOL Multiphysics. Modeling is done for a silver ball,  $r=0.02m$ , temperature at  $t=0$  is  $600^\circ C$ , at  $t=T$   $0^\circ C$ .

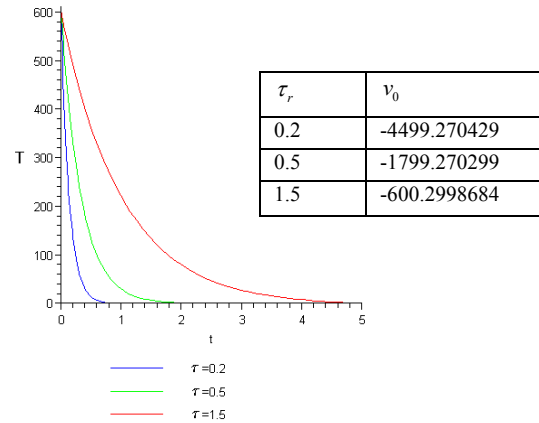


Figure 1. Dependence on  $\tau$  value

If we compare solutions of classic – parabolic – and hyperbolic heat conduction problems, using nonlinear boundary condition case, we obtain graphic in Figure 2.


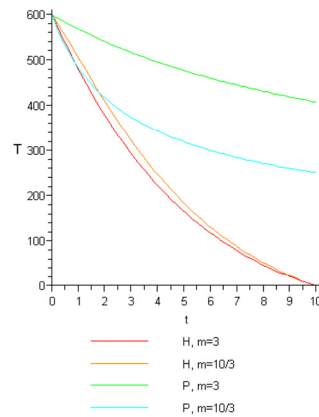



Figure 2. Nonlinear BC

We examined temperature on the radius. As you can see, the temperature on radius is not monotony. It means that the form of boundary condition on the surface can vary:

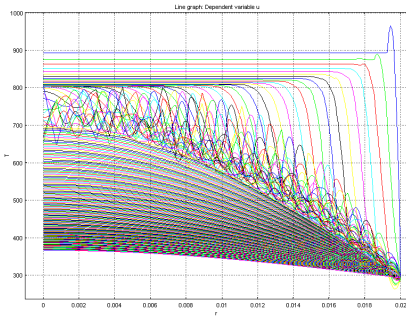

**Figure 3. Temperature distribution on radius**

It is very clear that at the beginning of the process hyperbolic term is extremely important but later process is described by classic heat equation. It is possible to define precise points where temperature is computed:

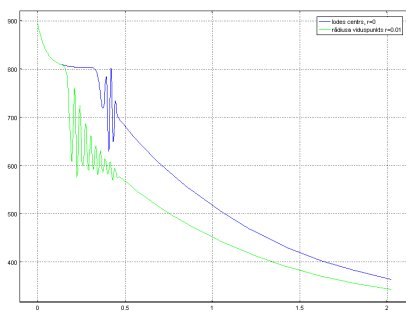

**Figure 4. Temperature changes at  $r=0m$  and  $r=0.01m$**

## 5 Conclusions

We have constructed some solutions for time inverse problems for hyperbolic heat equation with linear and nonlinear boundary conditions. The solutions for determination of initial heat flux are obtained in closed analytical form. Numerical results are obtained for spherical sample.

**Acknowledgements:** Research was supported by University of Latvia (Project No: 2009/0223/1DP/1.1.1.2.0/09/APIA/VIAA/008) and Council of Sciences of Latvia (Grant 09.1572).

### References:

- [1] Kobasko, N. I. "Intensive Steel Quenching Methods", Handbook "Theory and Technology of Quenching", Springer-Verlag, 1992.
- [2] Kobasko N.I. Self-regulated thermal processes during quenching of steels in liquid media. – *International Journal of Microstructure and Materials Properties*, Vol. 1, No 1, 2005, p. 110-125.

- [3]. Liqiu Wang, Xueshang Zhou, Xiaohao Wei. Heat Conduction, Springer, 2008.
- [4] M.Buik, A.Buikis. Hyperbolic Severe Intensive Steel Quenching Models for Rectangular Samples. *Proceedings of 5th NAUN/WSEAS International Conference on Fluid Mechanics and Heat and Mass Transfer, Corfu Island, Greece, July 22-24, 2010*. WSEAS Press, 2010. p.88-93
- [5] Buik M, Buikis A. Approximate Solutions of Heat Conduction Problems in Multi- Dimensional Cylinder Type Domain by Conservative Averaging Method, Part 1. *Proceedings of the 5th IASME/WSEAS Int. Conf. on Heat Transfer, Thermal Engineering and Environment, Vouliagmeni, Athens, August 25 -27, 2007*, p. 15 – 20.
- [6] Buikis A. Conservative averaging as an approximate method for solution of some direct and inverse heat transfer problems. *Advanced Computational Methods in Heat Transfer, IX*. WIT Press, 2006. p. 311-320.
- [7] Vilums R., Buikis A. Conservative averaging method for partial differential equations with discontinuous coefficients. *WSEAS Transactions on Heat and Mass Transfer*. Vol. 1, Issue 4, 2006, p. 383-390.
- [8] A.Buikis, Sh. Guseinov. Solution of reverse hyperbolic heat equation for intensive carburized steel quenching. – *Proceedings of 13th International Conference on Computational and Experimental Engineering and Sciences, December 1-6, 2005, Madras, India*, p.741-746.
- [9] Polyanin A.D. *Handbook of Linear Partial Differential Equations for Engineers and Scientists*. Chapman&Hall/CRC, 2002. (Russian edition, 2001).
- [10] Guenther R.B., Lee J.W. *Partial Differential Equations of Mathematical Physics and Integral Equations*. Dover Publications, Inc. New York, 1996.
- [11] Roach G.F. *Green's Functions*. Cambridge University Press, 1999.
- [12] Cole K. D., Haji-Sheikh A., Beck J. V., Litkouhi B. Heat Conduction Using Green's Functions. CRC Press, 2011.