

Theoretical and experimental study of the bearing structure of tank wagon

SORIN MIHAI RADU, BOGDAN TĂNĂSOIU

Department of Mechanical Engineering, Industrial Engineering and Transportation

University of Petroșani

Str. Universității, Nr.20, Petroșani

ROMÂNIA

sorin_mihai_radu@yahoo.com, bogdan.tanasoiu@gmail.com

Abstract: - The paper deals with one of the (studied) possibilities of connecting and attaching the chassis to the tank. The adopted constructive and technological solution answers to the requirements imposed through the international regulations by the UIC. The paper also presents the determination of the resistance of the studied technical solution using the finite element method and its ratification through experimental trials considering a static stress regime. The comparison of the theoretical determinations to the experimental ones leads to a positive assessment of the accuracy and veracity of the determination method as well as the safety of using the constructive solution into operation. Moreover, the paper brings forward a theoretical as well as an experimental study of the resistance of the attachment (frame) tank-chassis to the dynamic stress due to the collision shock. The theoretical determinations of the resistance, using the finite element method for the cushioning action of the buffers, have constituted the fundamental information for choosing the verified dangerous sections. The paper also brings forward collision trials and the conclusions imposed by the experimental study.

Key-Words : bearing structure, relative deformation, pressure

1 Introduction

Designing, building, promoting and operating a railway vehicle follows a complex process which applies to the strict rules and concepts of applied mechanics. Consequently a scientifically well established trajectory is adopted attached therefore to a series of precise norms which are imperiously necessary:

1. The establishment of a set of technical norms comprising the technical characteristics as well as the resulted economical and environmental impact.
2. The theoretical study on the adopted constructive and technical solutions, as well as finishing the technical characteristics for building a vehicle.
3. The design phase outmatched by a series of researches following to establish a series of solutions to be comprised in the design of the prototype which will be ratified by the experimental research.
4. The experimental research which follows a schedule comprising the possibilities in which the vehicle may react during operation considering the resistance of their bearing structure, the safety and dynamic while running.
5. Modifying the design and consequently the prototype following the implications of the researching programme as well as trials and the

rerun of the experimental research until it is finalized. The finalisation of the vehicle supposes that all the initially proposed requirements be respected.

The paper makes reference to the design phase of the prototype of the tank wagon together with the confirmations offered by the experimental study regarding the resistance of the bearing structures.

The experimental study, using static trials, of the resistance of the bearing structure is compulsorily continued through dynamic trials of repeated shock for the determination of the life span related to the random stress acting on operational vehicles.

The paper proposes to follow the modality in which theoretical and an experimental researches are made in order to finally lead to a correct appreciation of the technical, technological and constructive solutions adopted for the studied case, therefore the resistance in exploitation.

2 Theoretical verification calculation using the finite element method

The finite element method (FEM) is a procedure to approximately solve a series of differential equations, in given limited conditions, describing physical phenomena from various fields. Obtaining a number of exact solutions for the differential

equations describing physical phenomena in given limited conditions supposes the simplification of the model until the integration of the differential equations is realisable.

The steps required for a linearly static analysis to be carried out with the help of the MSC/NASTRAN software are realising the model, applying the loads and limit conditions, solving the problem as well as visualising the results.

A 3D model of the geometry of the wagon was realised in the design phase, model which was afterwards introduced in the MSC Nastran software and adapted the specific requirements for three-dimensional analysis with the finite element. Both the individual components as well as the components have been interconnected in order to obtain a sequential geometry of the model. The resulted geometry has been discretised.

Due to the fact that the structure of the wagon is made of thin metal plates, the finite element bi-dimensional analysis uses plate type elements. The thickness of the elements of the discretisation was chosen to be between 10 and 70 mm in order for acceptable values shall result in stress concentrators.

Taking into consideration that the structure of the wagon is symmetrical and the applied stress is symmetrical as well, the calculation considers only a quarter or a half of the entire structure.

The calculations were made for a tank wagon with the following characteristics:

The weight of the empty wagon

- $m_c = 27000$ kg;
- Maximum load $m_2 = 63000$ kg;
- Admissible load per axle $2Q_0 = 22500$ kg;
- Wheelbase $a = 10820$ mm;
- The external diameter of the tank without insulation $D = 2700$ mm.

The properties necessary for the static analysis, corresponding to steel, are – the longitudinal elasticity model (Young's module), $E = 210000$ [Mpa]; mass density $\rho = 7850$ kg/m³ and the coefficient of transversal contraction (Poisson's) $\nu = 0.3$.

The chassis and the attachment device are made of St52 DIN 17100 with $R_{p0.2} = 355$ N/mm² and the flow limit for the material of the tank, as the tank is equipped with an exterior heating installation welded on it, having the maximum calculation temperature of +190°, the flow limit at 190°C obtained through interpolation is $R_{p0.2} = 229$ N/mm².

The objective of the static analysis is to determine the relative deformations respectively von Mises stress [N/mm²] of the structure of the wagon considering the loading conditions imposed by the ERRI B12 Rp17. The simulated stresses which the vehicle underwent and the results obtained are presented in figures 1 to 4. The simulated stress which the vehicle underwent for the loads SV63t+CT2x1MN are the ones presented in figures 5 to 7.

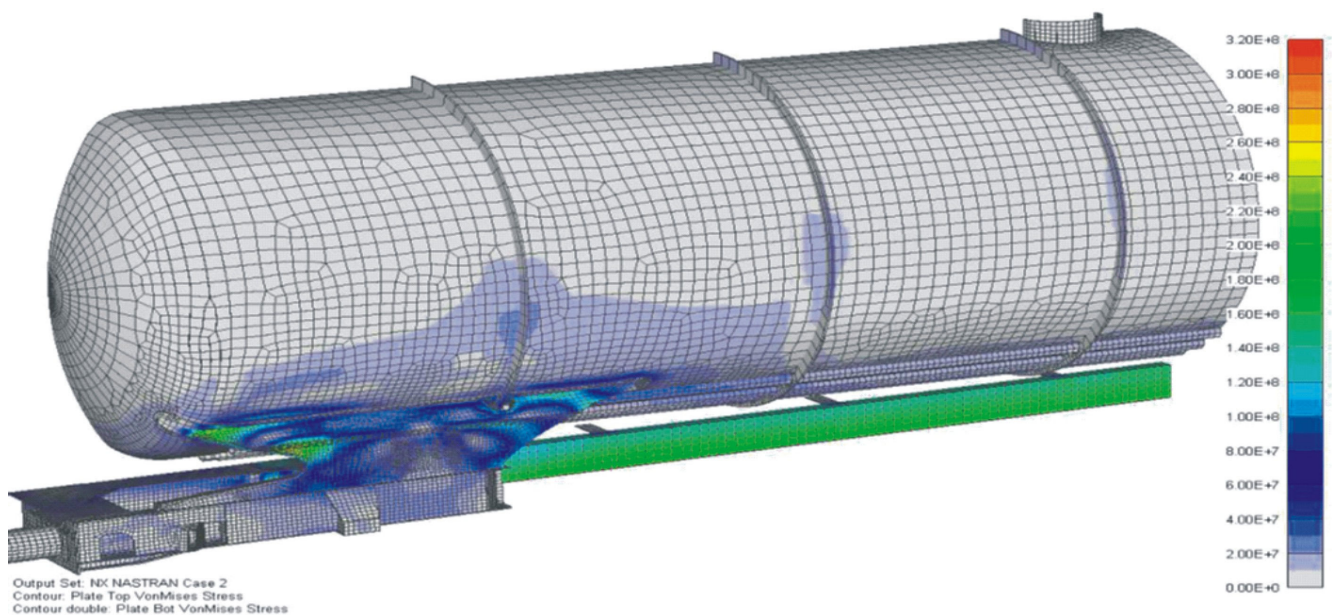


Fig.1 Central compression – CA 2MN – equivalent von Mises stress [N/m²]

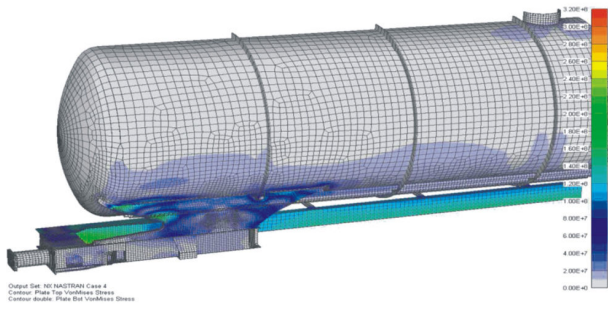


Fig.2 Traction TA T1,5MN – equivalent von Mises stress [N/m²]

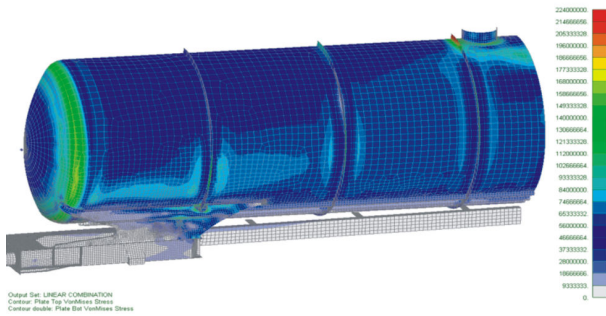


Fig.3 Pressure 1gx63000kg+p 3bar – SV63P3bar – equivalent von Mises stress [N/m²]

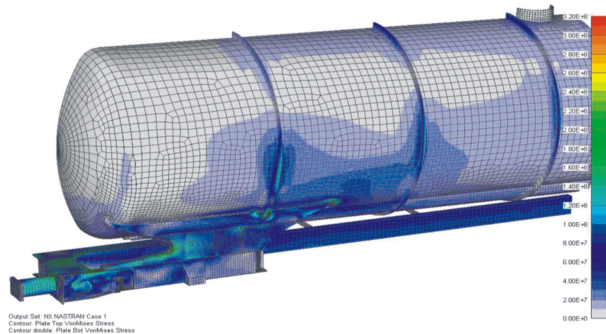


Fig.4 Buffer compression + vertical stress [SV63+CT2x1MN] – equivalent von Mises stress [N/m²]

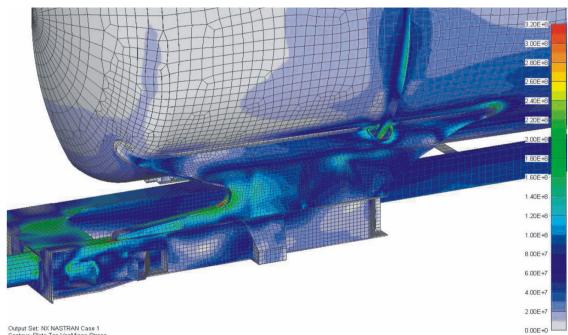


Fig.5 Equivalent von Mises stress [N/m²]

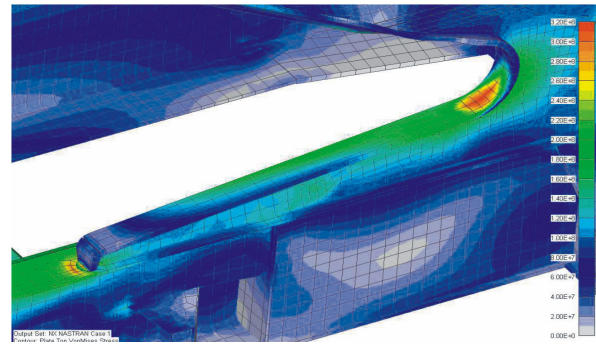


Fig.6 Equivalent von Mises stress [N/m²]

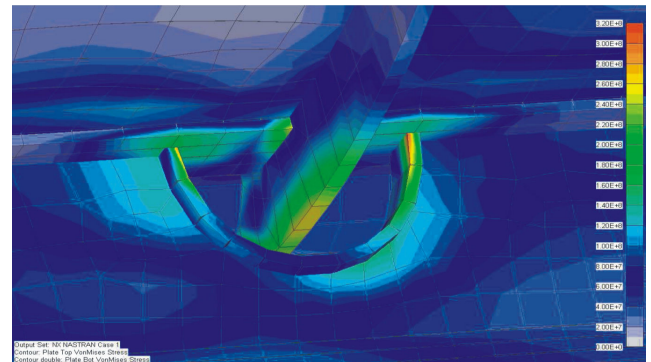


Fig.7 Equivalent von Mises stress [N/m²]

3 Static experimental determinations

Analysing the theoretical results obtained through calculations, the areas and sections the most dangerous considering the resistance to static stress stimulating the operational stress have been detected, according to ERRI B12 Rp17. Therefore, a number of 20 linear transducers and 15 three way transducers (marked with R hereinafter) were installed on the structure of the tank and its attachment to the chassis. They are resistive electrical transducers their purpose being that of determining the relative deformations, respectively tensions (in an elastic field). The location of the transducers is presented in the diagram in figure 8.

The following trials were made on a specialised test bench fitted with measuring, recording, and experimental data processing devices:

- Axial compression with an applied force of 2MN (CA 2MN);
- Axial traction with an applied force of 1.5MN (TA T1,5MN);
- 3bar pressure in the presence of vertical load SV=63000 kg (SV63P3bar);
- Buffer cushioning with an applied force of F=2x1MN (1 MN on each buffer) in the presence

- Acc1 [g] – the acceleration of the buffered wagon;
- Linear transducers stresses σ [N/mm²] and von Mises stressed [N/mm²] with rotary transducers marked with R hereinafter.

For the linear transducer 116 respectively the 118 one, the values in italic and bold presented in the tables with the experimental researches, represent

relative deformations experimentally determined expressed in [$\mu\text{m/m}$].

Collision trials consisted of two phases:

1. Preliminary trials made at increasing collision speed, namely from 6.71÷12.01 km/h in order to discover the most stressed areas. The results of these trials are presented in tables 3 and 4.

Table 3

TER	SV	Speed [km/h]									
		6.71	7.39	8.5	9.02	9.02	9.16	10.3	11.04	11.2	12.01
101	-6	-106	-112	-122	-118	-110	-116	-120	-148	-172	-258
0101	-7	-114	-124	-124	-120	-134	-142	-146	-176	-194	-286
102	-9	-108	-114	-122	-126	-122	-116	-126	-144	-148	-228
103	-9	20	27	31	32	35	35	39	50	52	94
104	-4	26	32	36	40	39	40	44	52	57	92
105	4	18	21	24	25	25	27	28	29	30	44
116	-97	-224	-226	-274	-286	-295	-319	-323	-339	-1664	-2028
118	69	182	193	220	245	252	278	280	297	301	1734
117	-4	-62	-77	-74	-77	-75	-79	-80	-93	-100	-170
0117	-2	-60	-68	-74	-75	-78	-79	-81	-90	-94	-167
F1 [kN]		339	370	435	457	463	465	532	596	602	1224
F2 [kN]		421	458	522	544	542	551	620	681	687	1158
D1 [mm]		58	64	74	78.5	79	80	90	97	98	105
D2 [mm]		57	63	73	77.5	78	79	89	96	97	104
Acc1 [g]		1.87	2.16	2.35	2.61	2.61	2.66	3.19	3.46	3.46	6.32

Table 4

Speed [km/h]	6.41	7.43	8.59	9.5	10.4	11.04	12.02
Rotary							
R1	48	50	53	54	57	60	73
R3	72	77	94	112	114	116	174
R4	191	209	234	241	256	281	372
R5	157	166	178	185	192	206	265
R11	97	103	109	121	124	122	140

2 Endurance trials at an approximate speed of 12 km/h, a series of 40 collision shocks.

The results of these trials are presented in tables 5 and 6.

Table 5

Speed [km/h]	11.92	11.92	12.04	12.03	Residual	11.92	Residual
TER	S.V.	Buffer 1	Buffer 10	Buffer 20	Buffer 30	[‰]	Buffer 40
101	-6	-258	-266	-280	-278	0.07	-274
102	-9	-193	-194	-243	-240	0.19	-221
103	-9	66	40	52	60	0.02	53
104	-4	124	111	95	93	0.06	88
116	-97	-1501	-1883	-2021	-1996	0.3	-1891
118	69	1707	1859	2058	1961	0.27	1961
117	-4	-203	-217	-266	-252	0.02	-231
F1 [kN]		1266	1214	1273	1208		1234
F2 [kN]		1234	1159	1231	1110		1156
Acc [g]		6.5	6.3	6.6	6.3		6.3

Table 6

Buffer no.	1	10	20	30	Residual	40	Residual
Speed [km/h]	11.92	11.92	12.04	12.03	[‰]	11.92	[‰]
R3	222	217	221	210	0.07	215	0.07
R4	393	394	379	395	0.3	386	0.3
R5	240	215	181	183	0.13	172	0.13

Figures 9, 10 and 11 present parameters F_1 , F_2 , and the acceleration Acc1 of collision. Figure 12

presents an area of the studied stress concentrator area.

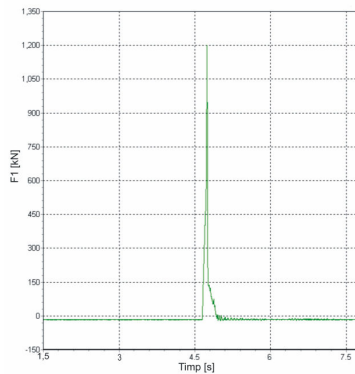


Fig.9 The variation of force F1 depending on time for the collision process – loaded wagon

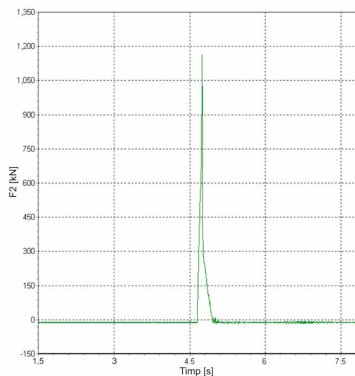


Fig.10 The variation of force F2 depending on the time of the collision process – loaded wagon

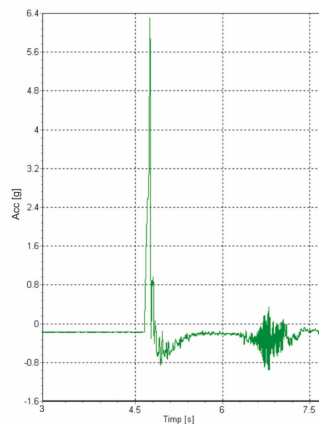


Fig.11 The variation of acceleration Acc depending on time for the collision process – loaded wagon



Fig. 11 The variation of acceleration Acc depending on time for the collision process – loaded wagon

4 Conclusions

It has been observed that the stress values obtained theoretically are in accordance with the values obtained experimentally. Moreover, experimental results confirm the dangerous areas of the bearing structure of the vehicle.

The determination using the finite element method offers extremely useful information regarding the investigation of the experimental research. The later one has the function of giving a verdict in its different phases concerning the resistance of the bearing surface of a rail vehicle.

The following conclusions may be drawn from the presented study:

1. The theoretical determination using the finite element method is a support and offers important information regarding the dangerous areas (the most stressed areas) which need to be experimentally investigated.

2. Shock trials through collision confirms the positive response of the studied structure to exploitation stress as in all the measured spots of the relative deformation respectively of stress permanent deformations were not recorded to exceed 2‰ according to B12 Rp17 ed. 8.

References:

- [1] Copaci I., Tănăsioiu A., Tănăsioiu B. – *On the Resistance of Tank Wagons to the Shock Caused by Collision*, Proceedings of the 3rd WSEAS International Conference on Finite Differences – Finite Elements – Finite Volumes – Boundary Elements (F-and-B '10), Polytechnic University of Bucharest, Romania April 20-22, 2010, ISBN 978-960-474-180-9, ISSN 1790-2769, pp. 23-27
- [2] Florin Dumitru Popescu, *Examinations regarding the possibility to continuously control the balance of rotor excavators with an inclinometer*, 9th WSEAS International Conference on AUTOMATION and INFORMATION (ICAI'08), Bucharest, Romania, June 24-26, 2008, pp. 40...43
- [3] Florin Dumitru Popescu, Ilie Mitran, *The analysis of vertical transport installations considering the theory automatic systems*, Proceedings of the 8th WSEAS International Conference on System Science and Simulation in Engineering (ICOSSSE '09), University of Genova, Italy October 17-19, 2009, pp.125-130
- [4] Sebeșan I., Copaci I. – *Teoria sistemelor elastice la vehiculele feroviare*, Matrix Publishing House, Bucharest, 2008