

# Intelligent Steganalytic System: Application on Natural Language Environment

ROSHIDI DIN, AZMAN SAMSUDIN

School of Computer Sciences  
Universiti Sains Malaysia (USM)  
11800, Minden, Pulau Pinang,  
MALAYSIA

[roshidi@uum.edu.my](mailto:roshidi@uum.edu.my), [azman@cs.usm.my](mailto:azman@cs.usm.my) <http://www.cs.usm.my>

*Abstract:* - This paper presents a consolidated view of the computational intelligence used in the natural language steganalysis. In order to understand the human intelligence on natural language, four major computational intelligence methods have been identified. They are bayesian, fuzzy logic, neural network, and genetic algorithm. This paper also presents a measurement tool to measure the natural language intelligent system properties based on steganalysis objectives. It can be learned that the more suitable intelligent systems to be applied in steganalysis domain properties are: neural network, genetic algorithm and fuzzy logic.

*Key-Words:* - Computational Intelligence, Steganalysis, Intelligent Steganalytic System, Natural Language Steganalysis

## 1 Introduction

Mankind demonstrates his intelligence by communicating effectively (through text, pictures, verbal expressions, or other medium), that is by acquiring new knowledge through experience, and then demonstrating what they have learned by communicating. Effective communication requires skills both in analysis of messages and in synthesis of messages. Besides that, the ability to learn or adapt one's behaviour to new situations is considered by many to be a vital component of intelligence. Indeed understanding a message also requires intelligence [1]. Therefore, from analysis point of view, an intelligent system is needed to understand the human intelligence especially on natural language understanding. Thus, serious efforts has been done to develop computerized systems for natural language understanding, and machine translation have taken place for more than half a century. However, the more general the domain, the more difficult it is to reach high quality translation. The same applies to natural language understanding. All systems need to deal with problems like ambiguity, lack of semantic coverage and pragmatic insight. With the progress of computation ability, various methods concerning computational intelligence have been successfully proposed [2]. This is because a fundamental goal of computational intelligence is the manipulation of natural language (NL's) using the tools of

computing science. One of such analyses found that a supervised learning based approach using computational intelligence [3] can be implemented to solve the natural language problem.

Computational intelligence is the study of the system design that acts intelligently in order to understand the principles that make intelligent behaviour possible, which involve iterative development or learning. Computational intelligence is also known as Soft Computing (SC) which is a very young discipline compared with other disciplines that have been studying intelligence much longer such as philosophy, neurobiology, evolutionary biology, and psychology. There are four major methods of computational intelligence which are bayesian, fuzzy logic, neural network, and genetic algorithm. IEEE Computational Intelligence Society has also defined subjects in computational intelligence include fuzzy systems, neural networks and evolutionary computation (genetic algorithms and swarm intelligence). One of the latest studies in computational intelligence is on steganalysis environment. The implementation of computational intelligence and their hybrid methods on steganalysis environment are collectively referred to as *Intelligent Steganalytic Systems* (ISS) as shown in Fig.1. ISS are becoming increasingly distributed in terms of both their applications and implementations when comes to

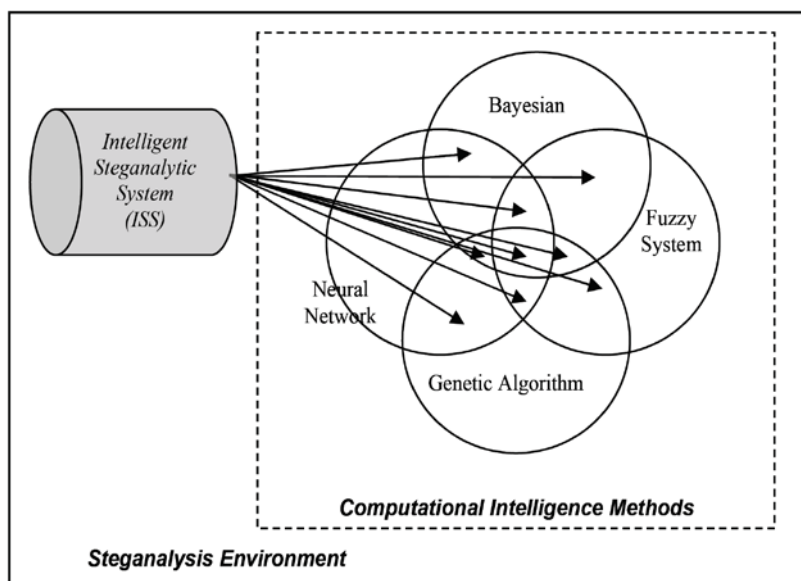


Fig.1. Synthesis of computational intelligence methods on steganalysis environment [4]

utilizing computational intelligence methods. There are three (3) main reasons for creating ISS which are integration of different technique enhancement, multiplicity of application tasks, and realizing multifunctionality. Most of their results have proven that the application of ISS has given a great influence on steganalysis performance. This paper is organized as follows.

Section 2 contains the implementation of the computational intelligence on natural language environment. Section 3 deals with the measurement of intelligent system properties, which is based on steganalysis objectives on natural language. Concluding remarks are given in Section 4.

## 2 Computational Intelligence Approach on Natural Language

There are numerous methods of computational intelligence that have been identified and widely used on natural language in order to understand the human intelligence such as bayesian, fuzzy logic, neural network, and genetic algorithm. This section will discuss the mentioned computational intelligence methods that have been used on natural language.

### a. Bayesian - Approach for Text Classification

Bayesian networks are popular within the community of uncertainty in computational intelligence. A Bayesian network is a graphical representation that depicts conditional independence among random variables in the domain and encodes the joint probability distribution. With a network at hand, probabilistic inference can be performed to

predict the outcome of some variables based on the observations of others. In light of this, Bayesian networks are widely used in diagnostic and classification systems [5].

Computationally, Bayesian networks provide an efficient way to represent relationships between attributes and allow reasonably fast inference of probabilities. Learning and reasoning are the main tasks of analyzing Bayesian networks [6]. The learning process through Bayesian networks has several advantages [7] which are easy to encode knowledge of an expert in a Bayesian network, and such knowledge can be used to improve learning efficiency and accuracy. Most of the text or document classification methods in Bayesian networks are based on the classical pattern recognition approaches. Generally, there are five Bayesian classifiers for document classification which are Naïve Bayes, Tree-Augmented Naïve Bayes (TAN), Compound terms [8], Discriminative Function, and The Bayesian Spanning Tree [9]. Tree Augmented Naive Bayes network is an effective and a stable classifier [10] which has demonstrated a stronger performance compared to the other Bayesian classification methods [11].

### b. Fuzzy - Approach for Text Representation

Up to now, research on fuzzy systems has gone into two main directions. The first one is considerably formal, and generalizes non-deterministic systems such as fuzzy machine models and fuzzy formal grammars, fuzzy neural networks, fuzzy algorithms and fuzzy programs. Meanwhile, the other is the linguistic approach to fuzzy systems, which is closely related to the theory of approximate reasoning, in which a fuzzy model is viewed as a

linguistic description by virtue of fuzzy logic propositions. It may be more directly applicable to natural language [12]. Meanwhile, Halliday [13] has concerned a fuzzy grammatics with theory of language, in the context of natural language as a metalanguage for intelligent computing. Among the main issues in computer environment, data representation is the transformation of natural language propositions into a formal computer manipulable language. The most established paradigm of the data representation in fuzzy logic is the paradigm of computing with words through Generalized Constraint Language-GCL [14] as shown in Fig.2.

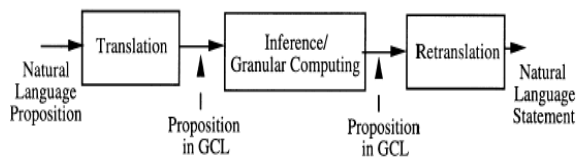


Fig.2. Process of Computing with Words [15]

Moreover, quantification is an important topic in knowledge representation and reasoning. Fuzzy quantifiers are, in principle, a powerful method for combining information [16]. The importance of fuzzy quantifiers in natural language has been pointed out on many occasions [17 - 18]. On the other hand, having adequate tools for the representation of natural language quantifiers is useful for an important number of applications such as expert systems, decision making and database systems.

#### c. Neural Network - Approach for Text Processing

Neural networks are being applied to a wide variety of automation problems including adaptive control, optimization, medical diagnosis, decision making, as well as information and signal processing, including speech processing. While neural networks are good at recognizing patterns, they are not good at explaining how they reach to their decisions.

Thus, selecting the weights of the decision is considered as a key issue in the use of neural networks. Neural networks can model complex non-linear relationships, and approximate any measurable function. They are also very good at classification of phenomena into preselected categories used in the training process [19]. The most difficult part of any neural network training problem is defining the proper training set [20].

Neural network, however, can capture the implicit information in the training data since they can model both the negative as well as the positive relationships [22]. Several researchers have

successfully used neural networks to process natural languages [23 -25]. There are several aspects on natural language which are using neural networks intensively such as partial parser [26], natural language learning [27], grammatical inference [28], NeurAlign [29], natural language translation [30], perception-based probabilistic model [31], and language modeling on large text corpora [32].

#### d. Genetic Algorithm - Approach for Text Optimization

Genetic algorithm is a robust search algorithm based on the mechanics of natural genetics to guide their trek through a search space, and finding increasing popularity in the field of optimization [33]. The main idea behind a genetic algorithm is the evolution of a problem's solution over many generations with each generation having a better solution than its predecessor. The language of genetic algorithm is heavily laced with biological metaphors from evolutionary literature, such as population, chromosome, crossover, cloning, mutation, genes and generations. Genetic algorithms are most appropriate for optimization type problems of the natural languages grammar. Based on the principle of "survival of the fittest", genetic algorithm can be used to learn the weights of a constraint dependency grammar from a corpus of annotated utterances.

Thus, the grammars of natural languages may be learned by using genetic algorithms that reproduce and mutate grammatical rules and part-of-speech tags, improving the quality of later generations of grammatical components [34]. Several studies have been used GA on natural language such as natural language tagging [35], Optimality Theoretic (OT) systems [36], evolving natural language grammars induction [37] and model of language structure [38].

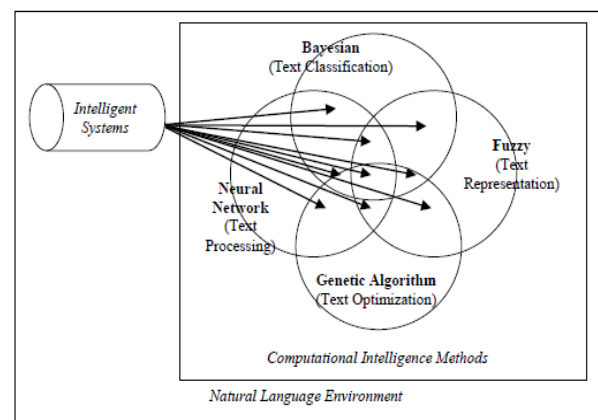


Fig.3. Intelligent System on Natural Language Environment [39]

Thus, based on the above explanation, it can be said that bayesian, neural network, fuzzy system and genetic algorithm methods are the prominent computational intelligence methods on natural language. Commonly, these methods and their hybrids are collectively referred to here as *Intelligent System (IS)* as shown in Fig.3.

### 3 Intelligent System Properties

Since the theory and practice of intelligent system in the process is being developed, there has been little emphasis in the literature to measure the usage of computational intelligence methods in natural language steganalysis. This measurement can be tested based on the steganalysis objectives such as security and robustness [40]. Thus, Table 1 has classified enormous research findings on several properties of intelligent systems [41 - 42] that have been identified on natural language.

Table 1: Property assessment of intelligent system properties on natural language environment

| Features  | Properties                            | Steganalysis   |
|---|---------------------------------------|----------------|
| Fuzzy diagnosis [43]  | Reasoning Under Uncertainty           | Very Relevance |
| Bayesian Networks deal with the uncertainty problems [44]                                       | Reasoning Under Uncertainty           | Very Relevance |
| The GA is a robust, effective and fault-tolerant method [45]                                    | Failure Detection                     | Very Relevance |
| Fuzzy logic is good enough, as the number of correctly detected consultations [46]              | Inference                             | Relevance      |
| Fuzzy-quantified have shown the effectiveness of inference method [47]                          | Inference                             | Relevance      |
| Hierarchical neural network system is best suited for text [48]                                 | Learning                              | Relevance      |
| The recurrent network learned sentence-processing patterns perfectly [49]                       | Self-Learning                         | Relevance      |
| Artificial neural network-based language processing has many potentials [50]                    | Self-Learning                         | Relevance      |
| Linguistic rules can be extracted from a multilayer feedforward neural network [51]             | Self-Learning                         | Relevance      |
| Neural network can learn a language model [52]  | Self-Learning                         | Relevance      |
| Recurrent neural networks are used to classify natural language sentences [53]                  | Self-Learning                         | Relevance      |
| Neural network language models on large amounts of text corpora [54]                            | Self-Learning                         | Relevance      |
| Parsing natural language texts using fuzzy context free grammars [55]                           | Self-Learning                         | Relevance      |
| Neural network can process data and efficiency of genetic algorithm is used to evolve them [56] | Adaptation and Learning               | Relevance      |
| The hybrid approach through combination of genetic algorithm and ILP [57]                       | Adaptation and Learning               | Relevance      |
| The genetic algorithm has been found better on search space exploration [58]                    | Adaptation and Learning               | Relevance      |
| The synthesis of neural network, fuzzy system and genetic algorithm [54]                        | Adaptation and Learning, Optimization | Very Relevance |
| The particle swarm optimization on feature dimension reduction [59]                             | Optimization                          | Relevance      |
| Genetic algorithms can provide automatic configuration for NN attacking complicated tasks [60]  | Self-Reconfigurability                | Very Relevance |
| Fuzzy-neural controller [61]  | Setting Control Goal                  | Relevance      |
| Genetic algorithms used as a fully automatic substitute tool [62]                               | Autonomous and Intelligence           | Very Relevance |
| Genetic algorithm is used successfully create symbolic expressions [63]                         | Non-Linearity                         | Very Relevance |
| Genetic algorithms are symbolic learners [38]   | Non-linearity                         | Very Relevance |
| Representation of ambiguity in fuzzy logic [64]   | Operator Representation               | Relevance      |
| Fuzzy quantifiers and truth qualifiers [65]   | Operator Representation               | Relevance      |
| Representation of sentences by fuzzy semantics [66]   | Knowledge Representation              | Very Relevance |
| Tree Augmented Naive Bayes network classifier is stable classifier [67]                         | Classification                        | Not Relevance  |
| Bayesian text classification [68]   | Classification                        | Not Relevance  |
| Poisson naive Bayes text classification model with weight-enhancing method [69]                 | Classification                        | Not Relevance  |
| Bayesian spanning tree for document categorization [70]   | Classification                        | Not Relevance  |

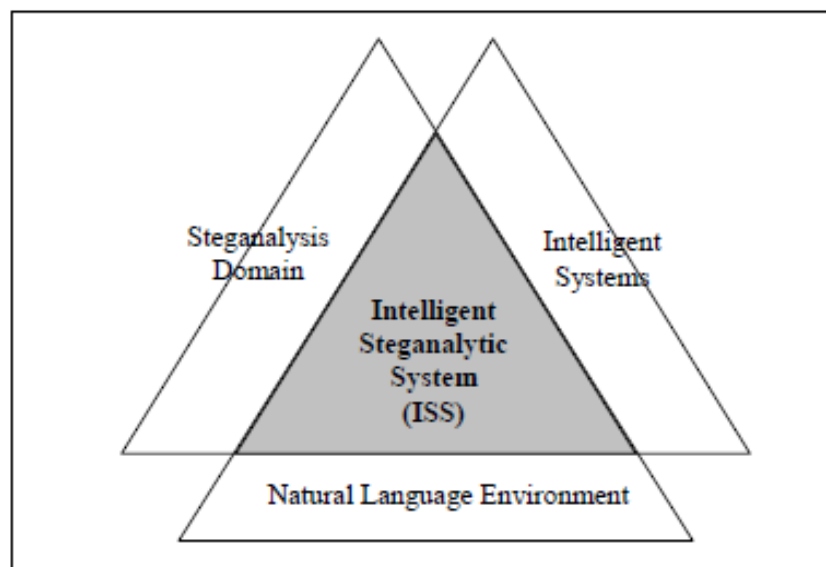


Fig.4. A building block of intelligent steganalytic system in natural language environment

It can be learned that the more suitable intelligent systems to be applied in steganalysis domain properties are: neural network, genetic algorithm and fuzzy logic. Neural network technique is more effective than previously existing techniques [71, 72, 73] and has better performance compared to Bayesian network due to its powerful learning capability in steganalysis.

Even though neural network technique is stronger on pattern recognition and learning capability, it lacks on systematic rule for feature selection. This is because neural network technique is using a heuristic trial and error process to train its classifier. Thus, the use of genetic algorithm offers a better solution to the above problems. Genetic algorithm is a good intelligent system technique in producing a systematic rule for feature selection of solution and very powerful for optimization. In addition, it has been identified as well to pass the detection of current steganalytic systems and also worked effectively on audio steganalysis and image steganalysis. As a result, neural network classifier can be trained efficiently by using the genetic algorithm. It is important to improve the efficiency of artificial neural network training and simplify the training algorithm. Several studies [74] have proven the effectiveness of the combination genetic algorithm and neural network in the dynamic environment is as good as the Dynamic Evolving Neural Fuzzy Inference System (DENFIS) which has been presented by Liu and Sung [75] (as an example of a hybrid intelligent system method).

Combination of neural network and genetic algorithm will produce good network architecture

for steganalysis in order to learn and justify the hidden message in natural language. Nevertheless, such justification needs to be verified on whether the text contain hidden message or vice versa. This action can be achieved by using a fuzzy logic feature where the output of neural network/genetic algorithm or combination genetic-neural can be manipulated through fuzzy reasoning based on its membership functionality and the capability of the fuzzy explanation. Perhaps, by combining neural network, genetic algorithm and fuzzy logic, this study will attain a powerful steganalysis tool for natural language. Thus, based on the above explanation, it can be summarized that the primary constituents of ISS on natural language are including natural language environment, steganalysis domain and intelligent systems approach as shown in Fig.4. It has also identified that an ISS can be utilized on natural language steganalysis. Despite different computational intelligence methods on ISS applications that have been proposed, the possibilities of using the ISS applications for natural language are still under-utilized.

## 4 Conclusion

This study has analyzed and classified several computational intelligence methods such as bayesian, fuzzy, neural network, and genetic algorithm on natural language in which computational intelligence can be applied more efficiently and intelligently in steganalysis

application. The primary contribution of this paper is to give a new light on steganalysis approach which in returned would contribute to natural language steganalysis. The definition of natural language steganalysis, however, needs more formalization. Hopefully, a powerful steganalysis on natural language can be achieved by using hybrid intelligent system which is the integration of computational intelligence technologies. Thus, it is expected that a good and powerful steganalysis technique will be produced in a near future through this new paradigm proposed by this paper.

### Acknowledgement

We thank to the School of Computer Sciences and Institute of Graduate Studies, Universiti Sains Malaysia (USM) for financial support provided us for the realization of this research.

### References:

- [1] Tanimoto S.L., *The Elements of Artificial Intelligence: An Introduction Using LISP*, Computer Science Press Inc., 1803 Research Boulevard, Rockville, Maryland 20850, 1987, ISBN -88175-113-8.
- [2] Russell S.J., and Norvig P., *Artificial Intelligence*, Prentice-Hall, Inc., 1995.
- [3] Chandramouli R., and Subbalakshmi S. K., Current Trends in Steganalysis: A Critical Survey, *Control, Automation, Robotics and Vision Conference (ICARCV)*, Vol. 2, December 6 – 9, 2004, pp. 964 – 967, ISBN 0-7803-8653-1.
- [4] Din R., and Samsudin A., Computational Intelligence in Steganalysis Environment, Recent Advances in Information Security and Privacy, *Proceedings of the 7th WSEAS International Conference on INFORMATION SECURITY and PRIVACY (ISP '08)*, World Scientific and Engineering Academy and Society WSEAS Press, Cairo Egypt, December 29 - 31, 2008, pp. 48-53. ISSN: 1790-5117 48 ISBN: 978-960-474-048-2
- [5] Wong M. L., and Leung K. S., An Efficient Data Mining Method for Learning Bayesian Networks Using an Evolutionary Algorithm-Based Hybrid Approach, *IEEE Transactions On Evolutionary Computation*, Vol. 8, No. 4, August, 2004, pp. 378 – 404.
- [6] Shetty S., and Song M., Structure Learning of Bayesian Networks Using a Semantic Genetic Algorithm-Based Approach, *IEEE*, 2005, pp. 454 – 458.
- [7] Colace F., and Santo M.D., A Bayesian Approach for Text Classification, *IEEE*, 2006, pp. 1323 – 1326.
- [8] Bai J., Nie J. Y., and Cao G., Integrating Compound Terms in Bayesian Text Classification, *Proceedings of International Conference on Web Intelligence (WI'05)*, Compiègne University of Technology, France September 19 – 22, 2005, pp. 598 – 601.
- [9] Shi H. F., Fan T. G., and Zhang G. L., Documents Categorization Based On Bayesian Spanning Tree, *IEEE Proceedings Of The Fifth International Conference On Machine Learning And Cybernetics*, Dalian, China, 13-16 August, 2006, pp. 1072 – 1075.
- [10] Shi H. B., Huang H. K., and Wang Z. H., The Stability of a Restricted Bayesian Network: An Empirical Investigation, *Proceedings of the Second International Conference on Machine Learning and Cybernetics*, Xian, China, 2-5 November, 2003, pp. 345 – 349.
- [11] Shi H. B., Wang Z. H., Huang H. K., and Li-Ping J., Text Classification Based on the TAN Model, *IEEE Proceeding TENCON'02*, 2002.
- [12] Wang H., and Qiu D., Computing with Words via Turing Machines: A Formal Approach, *IEEE Transactions on Fuzzy Systems*, Vol. 11(6), December 2003.
- [13] Halliday M. A. K., Fuzzy Grammatics: A Systemic Functional Approach to Fuzziness in Natural Language, *The International Joint Conference of the Fourth IEEE International Conference on Fuzzy Systems and the Second International Fuzzy Engineering Symposium*, Yokohama Japan, March 20 – 24, 1995, pp. 9 – 26.
- [14] Zadeh L. A., The Concept of a Generalized Constraint-A Bridge from Natural Languages to Mathematics, *NAFIPS 2005 - Annual Meeting of the North American Fuzzy Information Processing Society*, 2005.
- [15] Yages R. R., On The Retranslation Process In Zadeh's Paradigm Of Computing With Words, *IEEE Transactions on Systems, Man, and Cybernetics—Part B: Cybernetics*, Vol. 34, No. 2, April 2004, pp. 1184 – 1195.

- [16] Glockner I., Knoll A., Fuzzy Quantifiers: A Natural Language Technique for Data Fusion, *Proceedings of the 4<sup>th</sup> International Conference on Information Fusion (Fusion 2001)*, Montreal QC, Canada, August 7 – 10, 2001.
- [17] Zadeh L. A., A Computational Approach to Fuzzy Quantifiers in Natural Languages, *Comp. Machs. Appl.*, Vol. 8, 1983, pp. 149 – 184.
- [18] Ralescu A. L., Cardinality, Quantifiers, and the Aggregation of Fuzzy Criteria, *Fuzzy Sets System*, Vol. 69, 1995, pp. 355 – 365.
- [19] Tsoukalas L. H., *Fuzzy and Neural Approaches in Engineering*, John Wiley and Sons Ltd, Canada, 1997.
- [20] Terry P. J., and Vu D., Edge Detection Using Neural Networks, *IEEE*, 1993, pp. 391 – 395.
- [21] Lyon C., The Representation of Natural Language to Enable Neural Networks to Detect Syntactic Structures, *PhD Thesis*, University of Hertfordshire, 1994.
- [22] Lyon C., and Dickerson R., A Fast Partial Parse of Natural Language Sentences Using a Connectionist Method, *7th Conference of European Chapter of Association of Computational Linguistics*, 1995.
- [23] Miiikkulainen R., Subsymbolic Case-Role Analysis of Sentences with Embedded Clauses, *Cognitive Science*, Jan - Mar, Vol. 20 Number 1, 1996, pp. 47 – 73.
- [24] Negushi, M., Grammar Learning by a Self-Organizing Network, *Advances in Neural Information Processing Systems*, Vol. 9, 1997, pp. 27 - 34.
- [25] Fabrizio Costa, Paolo Frasconi, Vincenzo Lombardo, Giovanni Soda, *Towards Incremental Parsing of Natural Language using Recursive Neural Network*, Applied Intelligence, Kluwer Academic Publishers, Hingham, MA, USA, Vol. 19(1-2), 2003, pp. 9 – 25.
- [26] Lyon C., and Frank R., Neural network design for a natural language parser, *International Conference on Artificial Neural Networks (ICANN)*, 1995, pp. 105 - 110.
- [27] Towsey M., Diederich J., Schellhammer I., Chalup S., and Brugman C., Natural language learning by recurrent neural networks: a comparison with probabilistic approaches, *Proc. Joint Conf. on New Methods in Language Processing and Computational Natural Language Learning*, 1998, pp. 3 - 10.
- [28] Giles C. L., Miller C. B., Chen D., Chen H. H., Sun G. Z., and Lee Y. C., Learning and extracting finite state automata with second-order recurrent neural networks. *Neural Computation*, Vol. 4(3), 1992, pp. 393 – 405.
- [29] Necip F. A., Bonnie J. D., and Christof M., NeurAlign: Combining Word Alignments Using Neural Networks, *Proceedings of the Conference on Human Language Technology Conference and Conference on Empirical Methods in Natural Language Processing (HLT/EMNLP 2005)*, Vancouver, British Columbia, Canada, 6-8 October, 2005.
- [30] Koncor N., and Guthrie G., A Natural Language Translation Neural Network, *Proceedings of the International Conference on New Methods in Language Processing (NeMLaP)*, Manchester, UK, 1994, pp. 71 – 77.
- [31] Atherton M., and Lelewer D. A., A probabilistic model for natural language understanding, *Proceedings of the 1993 ACM/SIGAPP Symposium on Applied Computing: States of the Art and Practice*, Indianapolis, Indiana, United States, February 14 - 16, 1993.
- [32] Schwenk H., and Gauvain J., Training Neural Network Language Models On Very Large Corpora, *Proceedings of the conference on Human Language Technology and Empirical Methods in Natural Language Processing*, Vancouver, British Columbia, Canada, October 6 - 8, 2005, pp. 201 - 208.
- [33] Karr C. L., Genetic Algorithms and Fuzzy Logic for Adaptive Process Control in Intelligent Hybrid Systems edited by Suran Goonatilake and Sukhdev Khebbal, *John-Wiley and Sons Ltd*, England, 2001.
- [34] Losee R. M., Learning Syntactic Rules and Tags with Genetic Algorithms for Information Retrieval and Filtering: An Empirical Basis for Grammatical Rules, *Journal of the American Society for Information Science*, Vol. 51(9), 2000, pp. 834 - 840.
- [35] Enrique A., Gabriel L., Lourdes A., Natural language tagging with genetic algorithms, *Information Processing Letters*, Vol. 100 No. 5, 16 December 2006, pp. 173 – 182.

- [36] Strigin A., Learning OT grammars: A Model and a Genetic Algorithm, 2006. Available at <http://www.zas.gwz-berlin.de/mitarb/homepage/strigin/evolgaot.pdf>
- [37] Aycinena M., Kochenderfer M.J., and Mulford D. C., *An Evolutionary Approach To Natural Language Grammar Induction*, Stanford CS 224N Natural Language Processing, June 2003.
- [38] Smith, T. C. and Witten, I. H., A Genetic Algorithm for the Induction of Natural Language Grammars, *Proc IJCAI-95 Workshop on New Approaches to Learning for Natural Language Processing*, Montreal, Canada, 1995, pp. 17 – 24.
- [39] Din R., and Samsudin A., Digital Steganalysis: Computational Intelligence Approach, *INTERNATIONAL JOURNAL of COMPUTERS*, Vol. 3, Issue 1, 2009, pp. 161 - 170. ISSN: 1998-4308.
- [40] Bergmair R., *Towards Linguistic Steganography: A Systematic Investigation of Approaches, Systems, and Issues*, University of Derby, April, 2004.
- [41] Fukuda T., Learning, Adaptation and Evolution for Intelligent System, *Proceedings of the IEEE International Symposium on Industrial Electronics, (ISIE '97)*, Vol. 1, July 1997, pp. 7 – 11.
- [42] Fukuda T. and Shimojima K., Hierarchical Intelligent Robotic System -Adaptation, Learning and Evolution, *Proceeding of International Conference on Computational Intelligence and Multimedia Applications (ICCIMA'97)*, 1997, pp. 1 - 5.
- [43] Sano N., and Takahashi R., Solutions on Fuzzy Diagnosis by Inverse Process with Natural Language Input, *Fourth International Conference on knowledge-Based Intelligent Engineering Systems 6 Allied Technologies*, Brighton, UK, 30 Aug - 1 Sept, 2000, pp. 499 – 502.
- [44] Wang R. G., Gao J., and Xie Z., A Method for Text Information Acquisition Based on Bayesian Network, *IEEE International Conference on Information Acquisition*, Hefei, China, June 21 – 25, 2004, pp. 388 – 391. ISBN: 0-7803-8629-9.
- [45] Smith T. C., and Witten I. H., Learning Language Using Genetic algorithm, *Proceedings of the Connectionist, Statistical and Symbolic Approaches to Learning for Natural Language Processing*, Montreal, Canada, 1995, pp. 132 – 145.
- [46] Gómez A., Roperó J., and Leon C., A fuzzy logic system for classifying the contents of a database and searching consultations in natural language, *IEEE MELECON 2006*, Benalmádena (Málaga), Spain, May 16 - 19, 2006.
- [47] Okamoto W., Tano S., Inoue A., and Fujioka R., Rule-based Inference Method for Fuzzy-Quantified and Truth-Qualified Natural Language Propositions, *IEEE International Conference on Fuzzy Systems*, Sheraton Vancouver Wall Centre Hotel, Vancouver, BC, Canada, July 16-21, 2006.
- [48] Chen Z., Ni C., and Murphey Y. L., Neural Network Approaches for Text Document Categorization, *International Joint Conference on Neural Networks*, Sheraton Vancouver Wall Centre Hotel, Vancouver, BC, Canada, July 2006.
- [49] Johnson S., Kwasny S. C., and Kalman B. L., *An Adaptive Neural Network Parser*, 1994. Available at <http://www.cse.wustl.edu/~sck/pdf/Annie94.pdf>.
- [50] Wermter S., *Hybrid Approaches to Neural Network Based-Language Processing*, Technical Report TR-97030, International Computer Science Institute, Berkeley, California, 1997. Available at <http://citeseer.ist.psu.edu/wermter97hybrid.html>.
- [51] Ishibuchi H., Nii M., and Murata T., Linguistic Rule Extraction from Neural Networks and Genetic-Algorithm-Based Rule Selection, *International Conference on Neural Networks*, Vol. 4, Jun 9 – 12, 1997, pp. 2390 – 2395, ISBN: 0-7803-4122-8/97.
- [52] Xu W., Rudnicky A., Can Artificial Neural Networks Learn Language Models, *Proceedings of ICSLP 2000*, M1-13, October 16 – 20, 2000, Beijing, China.
- [53] Roa S., and Niño F., Classification of Natural Language Sentences using Neural Networks, *Proceedings of the Sixteenth International Florida Artificial Intelligence Research Society (FLAIRS) Conference*, May 12 - 14, 2003, pp. 444 - 449.
- [54] Schwenk H., and Gauvain J., Training Neural Network Language Models On Very Large Corpora, *Proceedings of the conference on Human Language Technology and Empirical Methods in Natural Language Processing*, Vancouver, British Columbia, Canada, October 6 - 8, 2005, pp. 201 - 208.



- [55] Carter P., and Kremer S. C., Fuzzy Grammar Induction from Large Corpora, *IEEE International Conference on Fuzzy Systems*, Sheraton Vancouver Wall Centre Hotel, Vancouver, BC, Canada, July 16 – 21, 2006.
- [56] Davila J. J., Genetic Algorithm and the Evolution of Neural Networks for Language Processing, *CELE-Twenty Workshop on Language Processing*, 2000. Available at: [http://helios.hampshire.edu/jdavila/jdavila\\_CELE\\_Twente.pdf](http://helios.hampshire.edu/jdavila/jdavila_CELE_Twente.pdf).
- [57] Kazakov D., and Manandhar S., Unsupervised Learning of Word Segmentation Rules with Genetic Algorithms and Inductive Logic Programming, *Machine Learning Journal*, Vol. 43, No. 1 – 2, April 2001.
- [58] Alba E., and Luque G., Natural Language Tagging with Parallel Genetic Algorithms, *Information Processing Letters*, Elsevier, Vol. 100(5), December 2006, pp. 173 – 182.
- [59] Liangtu S., and Xiaoming Z., Web Text Feature Extraction with Particle Swarm Optimization, *IJCSNS - International Journal of Computer Science and Network Security*, Vol.7, No.6, June 2007, pp. 132 – 136.
- [60] Dávila J. J., *Co-evolution of Neural Network Parameters for the Task of Natural Language Processing*, 1998. Available at [http://csp.gc.cuny.edu:8080/Mosaic\\_pages/nn\\_param\\_evol.ps](http://csp.gc.cuny.edu:8080/Mosaic_pages/nn_param_evol.ps).
- [61] Pilasinghe K., Watanabe K., Kiguchi K., and Izumi K., A Novel Modular Neuro-Fuzzy Controller Driven by Natural Language Commands, *IEEE Proceeding of the 40th SICE Annual Conference (SICE2001)*, Nagoya, Japan, July 25 - 27, 2001. ISBN: 0-7803-7306-5.
- [62] Schroder I., Pop H. F., Menzel W., and Foth K.A., Learning Grammar Weights Using Genetic Algorithms, *Proceedings Euro Conference Recent Advances in Natural Language Processing*, Tsigov Chark, Bulgaria, 2001, pp. 235 - 239.
- [63] Siegel E. V., and McKeown K. R., Gathering Statistics to Aspectually Classify Sentences with a Genetic Algorithm, *Proceedings of the 2<sup>nd</sup> International Conference on New Methods in Language Processing*, Ankara, Turkey, September 16 – 18, 1996.
- [64] Subasic P., and Huettner A., Affect Analysis of Text Using Fuzzy Semantic Typing, *IEEE Transaction on Fuzzy Systems*, Vol. 9(4), 2001, pp. 483 – 496. ISSN: 1063-6706.
- [65] Okamoto W., Tano S., Inoue A., and Fujioka R., A Generalized Inference Method for Natural Language Propositions Involving Fuzzy Quantifiers and Truth Qualifiers, *The 14th IEEE International Conference on Fuzzy Systems*, Reno, Nevada, USA, May 22 - 25, 2005, pp. 672. ISBN: 0-7803-9159-4.
- [66] Sun J., Shaban K., Podder S., Karry F., Basir O., and Kamel M., Fuzzy Semantic Measurement for Synonymy And Its Application in An Automatic Question-Answering System, *IEEE International Conference on Natural Language Processing and Knowledge Engineering*, Beijing, China, October 26 – 29, 2003, pp. 263 – 268. ISBN: 0-7803-7902-0.
- [67] Shi H. B., Huang H. K., and Wang Z. H., The Stability of a Restricted Bayesian Network: An Empirical Investigation, *Proceedings of the Second International Conference on Machine Learning and Cybernetics*, Xian, China, November 2 - 5, 2003, pp. 345 – 349.
- [68] Bai J., Nie J. Y., and Cao G., Integrating Compound Terms in Bayesian Text Classification, *Proceedings of the International Conference on Web Intelligence (WI'05)*, Compiègne University of Technology, France, September 19 – 22, 2005, pp. 598 - 601.
- [69] Kim S. B., Han K. S., Rim H. C., and Myaeng A. S. H., Some Effective Techniques For Naive Bayes text Classification, *IEEE Transactions On Knowledge And Data Engineering*, Vol. 18, No. 11, Nov, 2006, pp. 1457 -1466.
- [70] Shi H. F., Fan T. G., and Zhang G. L., Documents Categorization Based On Bayesian Spanning Tree, *IEEE Proceedings Of The Fifth International Conference On Machine Learning And Cybernetics*, Dalian, China, August 13-16, 2006, pp. 1072 – 1075.
- [71] Liu S., Yao H., and Gao W., Steganalysis Based On Wavelet Texture Analysis And Neural Network, *Fudan Journal (Natural Science)*, Vol. 5, 2004, pp. 910 - 913.
- [72] Din R., and Sudin R., Neural Network Approach In Predicting Academic Performance, *WSEAS 2001 International Conference on Neural Network and*

- Applications (NNA 2001)*, Puerto De La Cruz, Canary Islands, Spain, February 2001.
- [73] Sanchez V. G. C., Villegas O. O. V., Salgado G. R., and Dominguez H. D. J. O., Quality Inspection of Textile Artificial Textures Using a Neuro-Symbolic Hybrid System Methodology, *WSEAS Transaction of Computer*, Issue 12, Volume 7, December 2008, pp. 1899 – 1905.
- [74] Oh I. S., Lee J. S., and Moon B. R., Hybrid Genetic Algorithms for Feature Selection, *IEEE Transactions on Pattern Analysis and Machine Intelligence*, Vol. 26(11), November. 2004, pp. 1424 – 1437.
- [75] Liu Q., and Sung A. H., Feature Mining and Neuro-Fuzzy Inference System For Steganalysis Of LSB Matching Steganography In Grayscale Images, *Proceedings of the 20th International Joint Conference on Artificial Intelligence (IJCAI 2007)*, Hyderabad, India, January 6-12, 2007, pp. 2808 – 2813.